
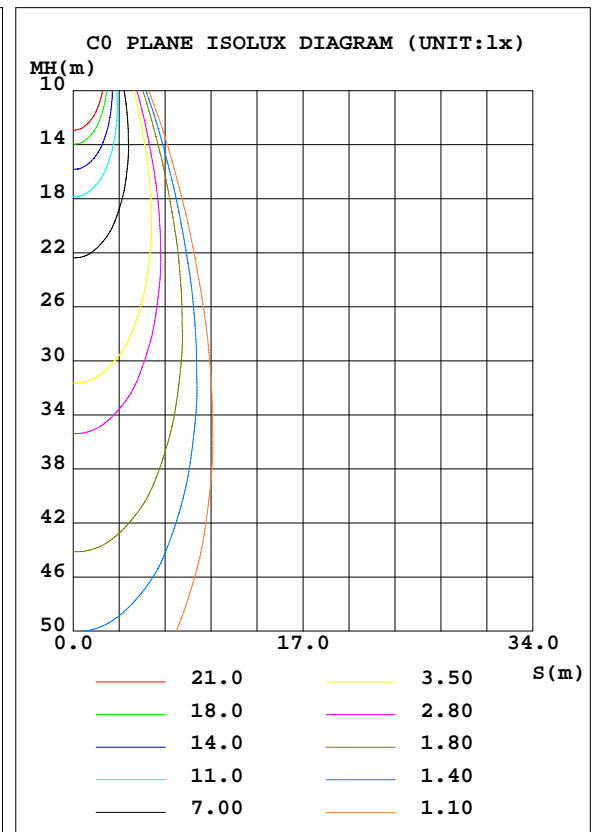


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.00V I:0.1010A P:14.150W PF:0.9580 Freq:50.00Hz Lamp Flux:940.669x1 lm		
NAME: MQT-LED0515-X	TYPE: LED 4000K	WEIGHT: N/A
SPEC.: MQT-LED0515-X	DIM.: 85*95MM	SERIAL No.: 20
MFR.:	SUR.: 0.06	Shielding Angle: N/A

DATA OF LAMP		PHOTOMETRIC DATA Eff: 66.48 lm/W			
MODEL	SP G16 4000K	I _{max} (cd)	3505	S/MH(C0/180)	0.47
NOMINAL POWER(W)	14.15	LOR(%)	100.0	S/MH(C90/270)	0.44
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	940.67	η UP, DN(C0-180)	0.2,55.1
NOMINAL FLUX(lm)	940.669	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.2,44.4
LAMPS INSIDE	1	η up(%)	0.4	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	220	η down(%)	99.6	CIBSE SHR MAX	0.50

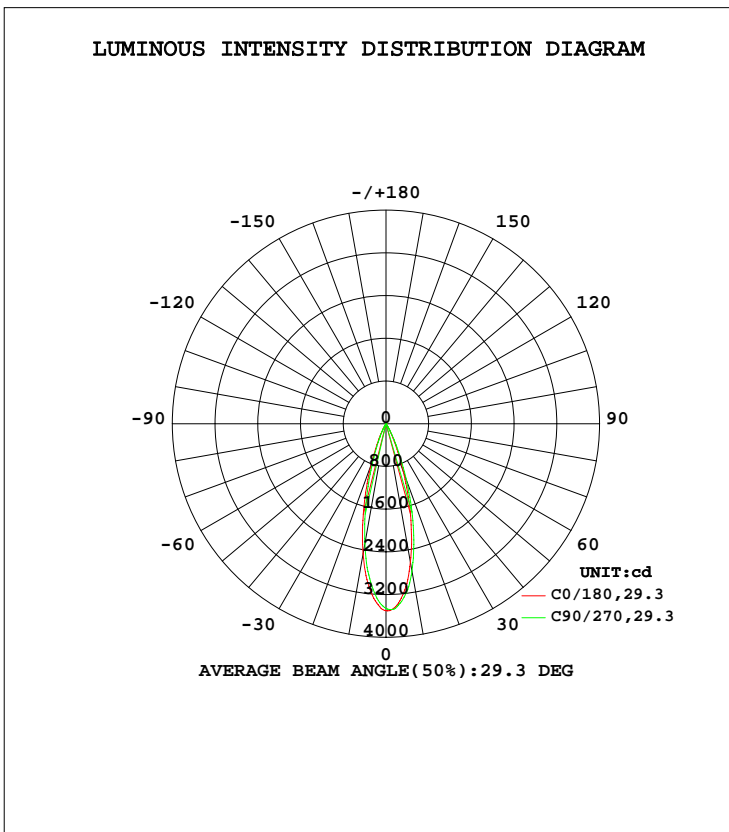

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:WEIJIE
 Test Date:2023-06-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:9.420m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2633	2783	2803	2624	2476	2308	2278	2409	0- 10	284.6	284.6	30.3,30.3
20	950.5	1097	1116	944.2	800.2	685.9	664.6	773.3	10- 20	452.1	736.7	78.3,78.3
30	133.7	159.9	158.3	124.9	102.8	87.18	86.31	104.6	20- 30	177.5	914.2	97.2,97.2
40	2.954	2.941	2.820	2.553	2.599	2.447	2.456	2.825	30- 40	21.41	935.6	99.5,99.5
50	0.3395	0.3050	0.2652	0.3050	0.3015	0.2892	0.2874	0.2996	40- 50	0.7762	936.4	99.5,99.5
60	0.0210	0	0	0	0	0.0079	0	0.0026	50- 60	0.0748	936.5	99.6,99.6
70	0	0	0	0	0	0	0	0	60- 70	0.0003	936.5	99.6,99.6
80	0	0	0	0	0	0	0	0	70- 80	0	936.5	99.6,99.6
90	0	0	0	0	0	0	0	0	80- 90	0	936.5	99.6,99.6
100	0	0	0	0	0	0	0	0	90-100	0	936.5	99.6,99.6
110	0	0	0	0	0	0	0	0	100-110	0	936.5	99.6,99.6
120	0	0	0	0	0	0	0	0	110-120	0	936.5	99.6,99.6
130	0	0.0104	0.0158	0.0132	0.0525	0.0600	0.0051	0.0263	120-130	0.0033	936.5	99.6,99.6
140	0.4316	0.4976	0.3971	1.238	0.8978	0.7300	0.7026	0.6153	130-140	0.2270	936.7	99.6,99.6
150	1.880	1.728	1.722	1.871	2.338	2.430	2.563	2.286	140-150	0.7817	937.5	99.7,99.7
160	3.835	3.745	3.776	3.826	4.302	4.340	4.769	4.306	150-160	1.420	938.9	99.8,99.8
170	4.936	4.947	4.834	5.015	4.854	4.767	4.791	4.787	160-170	1.292	940.2	99.9,99.9
180	5.494	5.239	5.249	4.942	5.505	5.221	5.249	4.937	170-180	0.4757	940.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 936.21 lm

%lum = 99.5%
%lamp = 99.5%

Conical surface Flux(120deg): 936.47 lm


%lum = 99.6%
%lamp = 99.6%

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:WEIJIE
Test Date:2023-06-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.420m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.00V I:0.1010A P:14.150W PF:0.9580 Freq:50.00Hz Lamp Flux:940.669x1 lm		
NAME: MQT-LED0515-X	TYPE: LED 4000K	WEIGHT: N/A
SPEC.: MQT-LED0515-X	DIM.: 85*95MM	SERIAL No.: 20
MFR.:	SUR.: 0.06	Shielding Angle: N/A

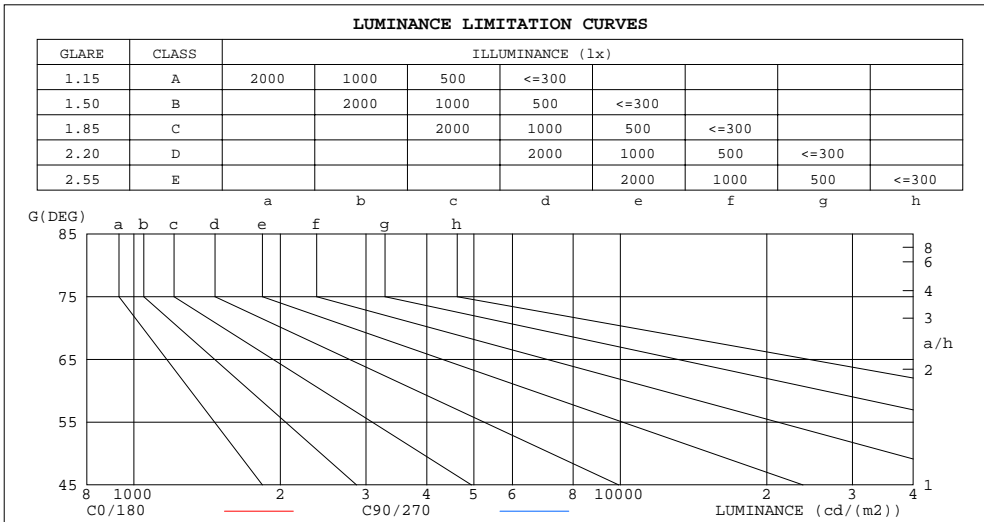

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	0
80	0	0
75	0	0
70	0	0
65	0	0
60	15	0
55	59	0
50	189	147
45	450	381


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: WEIJIE
 Test Date: 2023-06-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 9.420m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.00V I:0.1010A P:14.150W PF:0.9580 Freq:50.00Hz Lamp Flux:940.669x1 lm		
NAME: MQT-LED0515-X	TYPE: LED 4000K	WEIGHT: N/A
SPEC.: MQT-LED0515-X	DIM.: 85*95MM	SERIAL No.: 20
MFR.:	SUR.: 0.06	Shielding Angle: N/A

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.13	1.11	1.09	1.11	1.09	1.07	1.06	1.05	1.04	1.03	1.02	1.01	.99	.99	.98	.96
2.0	1.07	1.04	1.02	1.06	1.03	1.01	1.03	1.00	.98	.00	.98	.96	.97	.95	.94	.93
3.0	1.03	.99	.96	1.01	.98	.95	.99	.96	.94	.97	.94	.92	.94	.93	.91	.90
4.0	.99	.95	.92	.98	.94	.91	.95	.92	.90	.94	.91	.89	.92	.90	.88	.87
5.0	.95	.91	.88	.94	.90	.87	.92	.89	.86	.91	.88	.86	.89	.87	.85	.84
6.0	.91	.87	.84	.91	.87	.84	.89	.86	.83	.88	.85	.83	.87	.84	.82	.81
7.0	.88	.84	.81	.88	.84	.81	.87	.83	.81	.86	.82	.80	.85	.82	.80	.79
8.0	.86	.81	.78	.85	.81	.78	.84	.80	.78	.83	.80	.78	.82	.79	.77	.76
9.0	.83	.79	.76	.82	.78	.76	.82	.78	.76	.81	.78	.75	.80	.77	.75	.74
10.0	.80	.76	.74	.80	.76	.73	.79	.76	.73	.79	.75	.73	.78	.75	.73	.72

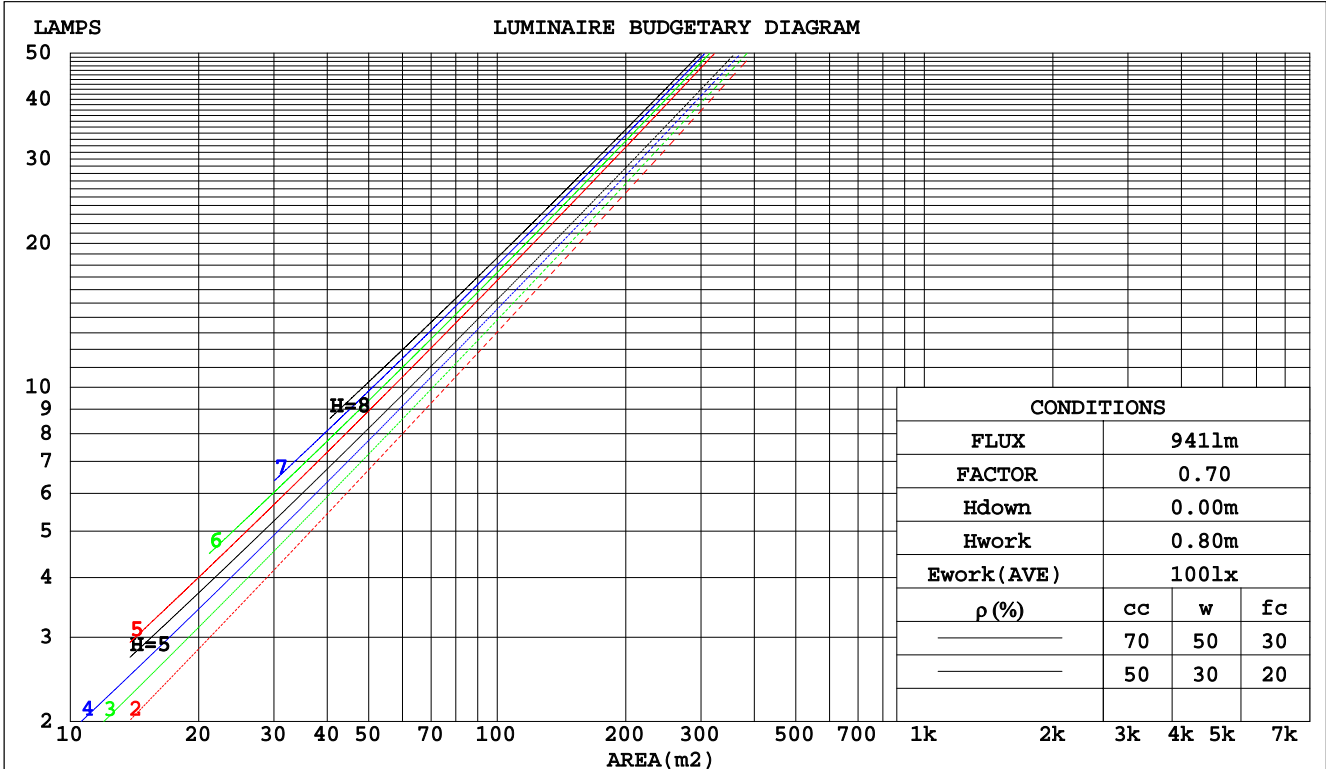

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: WEIJIE
 Test Date: 2023-06-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 9.420m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.00V I:0.1010A P:14.150W PF:0.9580 Freq:50.00Hz		
Lamp Flux:940.669x1 lm		
NAME: MQT-LED0515-X	TYPE: LED 4000K	WEIGHT: N/A
SPEC.: MQT-LED0515-X	DIM.: 85*95MM	SERIAL No.: 20
MFR.:	SUR.: 0.06	Shielding Angle: N/A

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.138	.079	.025	.131	.075	.024	.119	.068	.022	.107	.062	.020	.096	.056	.018	
2.0	.128	.070	.022	.122	.067	.021	.112	.062	.019	.102	.057	.018	.093	.053	.017	
3.0	.120	.064	.019	.115	.062	.019	.106	.058	.017	.098	.054	.016	.091	.050	.016	
4.0	.112	.058	.017	.108	.057	.017	.101	.054	.016	.094	.050	.015	.088	.048	.015	
5.0	.106	.054	.016	.103	.053	.015	.096	.050	.015	.090	.048	.014	.085	.045	.014	
6.0	.101	.050	.014	.098	.049	.014	.092	.047	.014	.087	.045	.013	.082	.043	.013	
7.0	.096	.047	.013	.093	.046	.013	.088	.045	.013	.084	.043	.013	.080	.041	.012	
8.0	.091	.045	.013	.089	.044	.012	.085	.042	.012	.081	.041	.012	.077	.040	.012	
9.0	.088	.042	.012	.086	.042	.012	.082	.040	.011	.078	.039	.011	.075	.038	.011	
10.0	.084	.040	.011	.082	.040	.011	.079	.039	.011	.076	.038	.011	.073	.037	.011	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.172	.161	.151	.147	.138	.130	.101	.095	.090	.058	.055	.052	.019	.018	.017	
2.0	.154	.136	.121	.132	.117	.105	.090	.081	.073	.052	.047	.043	.017	.015	.014	
3.0	.139	.117	.099	.119	.101	.086	.082	.070	.060	.047	.041	.036	.015	.013	.012	
4.0	.127	.101	.082	.109	.088	.071	.075	.061	.050	.043	.036	.030	.014	.012	.010	
5.0	.116	.089	.069	.100	.077	.060	.069	.054	.042	.040	.032	.025	.013	.010	.008	
6.0	.107	.079	.059	.092	.069	.051	.064	.048	.036	.037	.028	.022	.012	.009	.007	
7.0	.100	.071	.051	.086	.062	.044	.059	.043	.031	.035	.025	.019	.011	.008	.006	
8.0	.094	.064	.044	.081	.056	.039	.056	.039	.027	.032	.023	.016	.010	.008	.005	
9.0	.088	.059	.039	.076	.051	.034	.053	.036	.024	.031	.021	.014	.010	.007	.005	
10.0	.083	.054	.035	.072	.047	.030	.050	.033	.021	.029	.020	.013	.009	.006	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:WEIJIE
 Test Date:2023-06-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:9.420m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.00V I:0.1010A P:14.150W PF:0.9580 Freq:50.00Hz Lamp Flux:940.669x1 lm		
NAME: MQT-LED0515-X	TYPE: LED 4000K	WEIGHT: N/A
SPEC.: MQT-LED0515-X	DIM.: 85*95MM	SERIAL No.: 20
MFR.:	SUR.: 0.06	Shielding Angle: N/A

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.5	7.1	6.7	7.3	7.4	6.8	7.4	7.0	7.6	7.8
3H	6.3	6.9	6.5	7.1	7.3	6.6	7.2	6.9	7.4	7.6
4H	6.2	6.8	6.5	7.0	7.2	6.5	7.1	6.8	7.3	7.6
6H	6.1	6.7	6.4	6.9	7.2	6.5	7.0	6.7	7.2	7.5
8H	6.1	6.6	6.4	6.9	7.1	6.4	6.9	6.7	7.2	7.5
12H	6.0	6.6	6.4	6.8	7.1	6.4	6.9	6.7	7.1	7.4
4H 2H	6.2	6.8	6.5	7.0	7.2	6.5	7.1	6.8	7.3	7.6
3H	6.0	6.6	6.4	6.8	7.1	6.4	6.9	6.7	7.1	7.4
4H	6.0	6.4	6.3	6.7	7.0	6.3	6.7	6.6	7.0	7.3
6H	5.8	6.3	6.2	6.6	6.9	6.2	6.6	6.5	6.9	7.3
8H	5.8	6.2	6.2	6.5	6.9	6.1	6.5	6.5	6.9	7.2
12H	5.7	6.1	6.1	6.5	6.9	6.1	6.4	6.5	6.8	7.2
8H 4H	5.8	6.2	6.2	6.5	6.9	6.1	6.5	6.5	6.9	7.2
6H	5.7	6.0	6.1	6.4	6.8	6.0	6.3	6.4	6.7	7.1
8H	5.6	5.9	6.1	6.3	6.8	5.9	6.2	6.4	6.6	7.1
12H	5.6	5.8	6.0	6.2	6.7	5.9	6.1	6.3	6.6	7.0
12H 4H	5.7	6.1	6.1	6.5	6.9	6.1	6.4	6.5	6.8	7.2
6H	5.6	5.9	6.1	6.3	6.8	5.9	6.2	6.4	6.6	7.1
8H	5.6	5.8	6.0	6.2	6.7	5.9	6.1	6.3	6.6	7.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 4.9 / -31.8					+ 4.7 / - 1.5				
1.5H	+ 7.6 / -31.5					+ 7.4 / -21.1				
2.0H	+ 8.0 / - 1.5					+ 7.7 / - 1.5				

CIE Pub.117, 940.7 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -0.2)
Area: 0.0028 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:WEIJIE
Test Date:2023-06-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.420m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.00V I:0.1010A P:14.150W PF:0.9580 Freq:50.00Hz Lamp Flux:940.669x1 lm		
NAME: MQT-LED0515-X	TYPE: LED 4000K	WEIGHT: N/A
SPEC.: MQT-LED0515-X	DIM.: 85*95MM	SERIAL No.: 20
MFR.:	SUR.: 0.06	Shielding Angle: N/A


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	91	86	82	91	85	82	90	85	82	79
0.80	98	93	90	97	93	90	96	92	89	86
1.00	102	97	94	101	96	93	99	96	93	89
1.25	105	101	98	104	100	97	102	99	96	93
1.50	108	104	101	106	103	100	104	101	99	95
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	107	104	107	104	102	97
3.00	113	110	107	111	108	106	107	105	104	97
4.00	114	112	110	112	110	109	109	107	106	99
5.00	116	114	112	114	112	110	110	108	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:WEIJIE
 Test Date:2023-06-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:9.420m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.00V I:0.1010A P:14.150W PF:0.9580 Freq:50.00Hz Lamp Flux:940.669x1 lm		
NAME: MQT-LED0515-X	TYPE: LED 4000K	WEIGHT: N/A
SPEC.: MQT-LED0515-X	DIM.: 85*95MM	SERIAL No.: 20
MFR.:	SUR.: 0.06	Shielding Angle: N/A

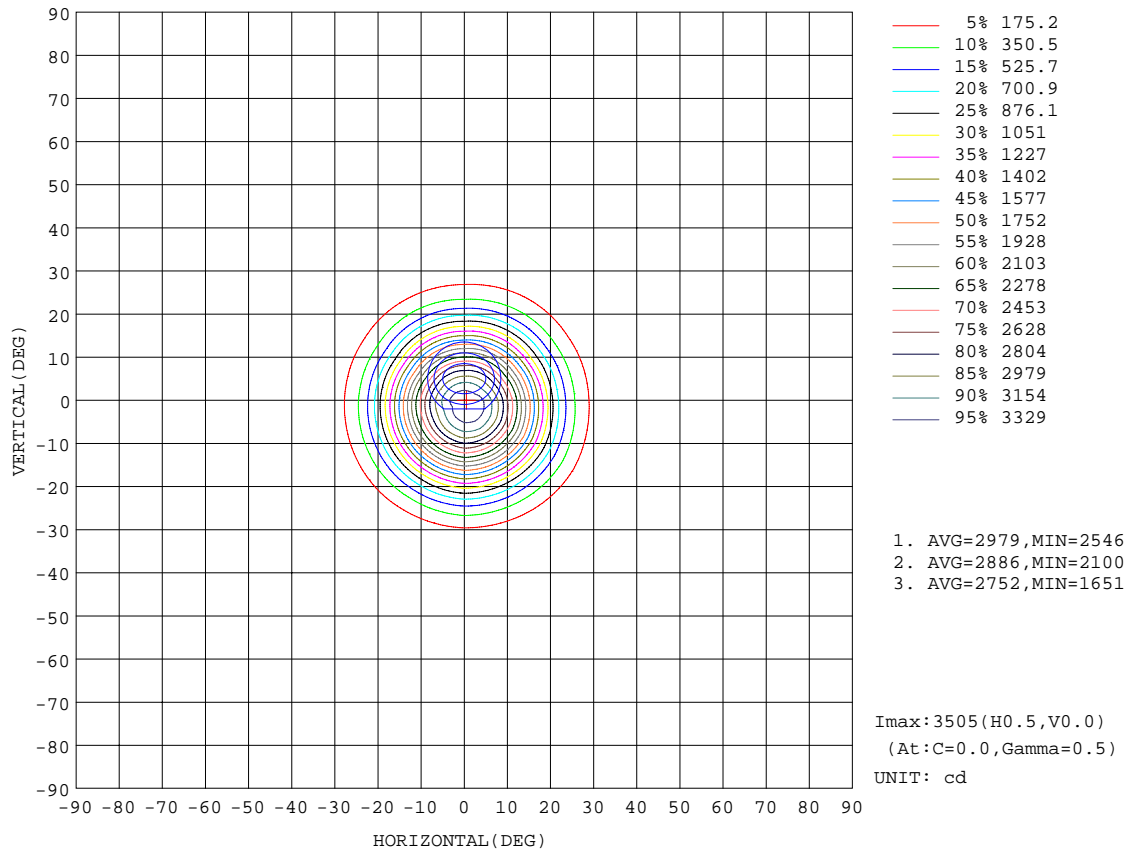


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: WEIJIE
 Test Date: 2023-06-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 9.420m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.00V I:0.1010A P:14.150W PF:0.9580 Freq:50.00Hz Lamp Flux:940.669x1 lm		
NAME: MQT-LED0515-X	TYPE: LED 4000K	WEIGHT: N/A
SPEC.: MQT-LED0515-X	DIM.: 85*95MM	SERIAL No.: 20
MFR.:	SUR.: 0.06	Shielding Angle: N/A

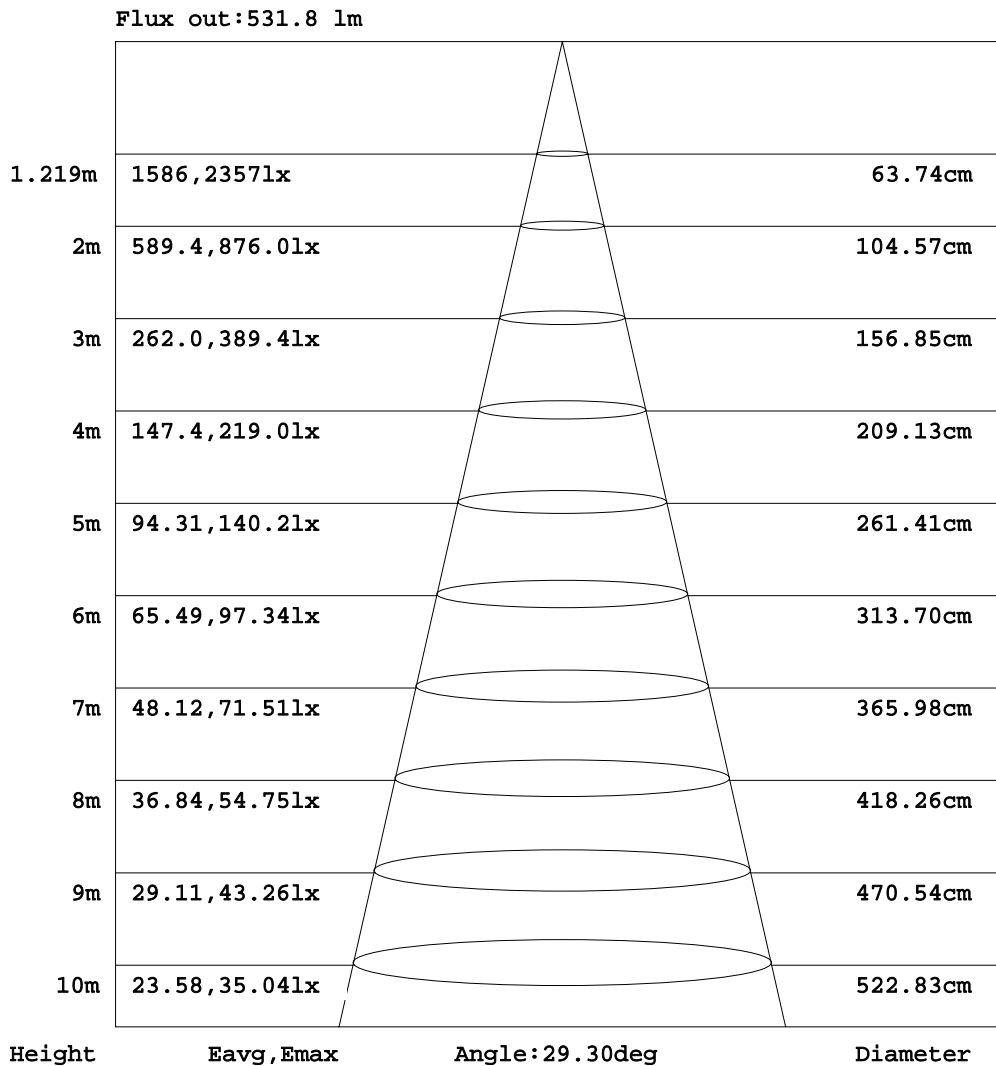


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:WEIJIE
 Test Date:2023-06-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:9.420m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.00V I:0.1010A P:14.150W PF:0.9580 Freq:50.00Hz Lamp Flux:940.669x1 lm		
NAME: MQT-LED0515-X	TYPE: LED 4000K	WEIGHT: N/A
SPEC.: MQT-LED0515-X	DIM.: 85*95MM	SERIAL No.: 20
MFR.:	SUR.: 0.06	Shielding Angle: N/A

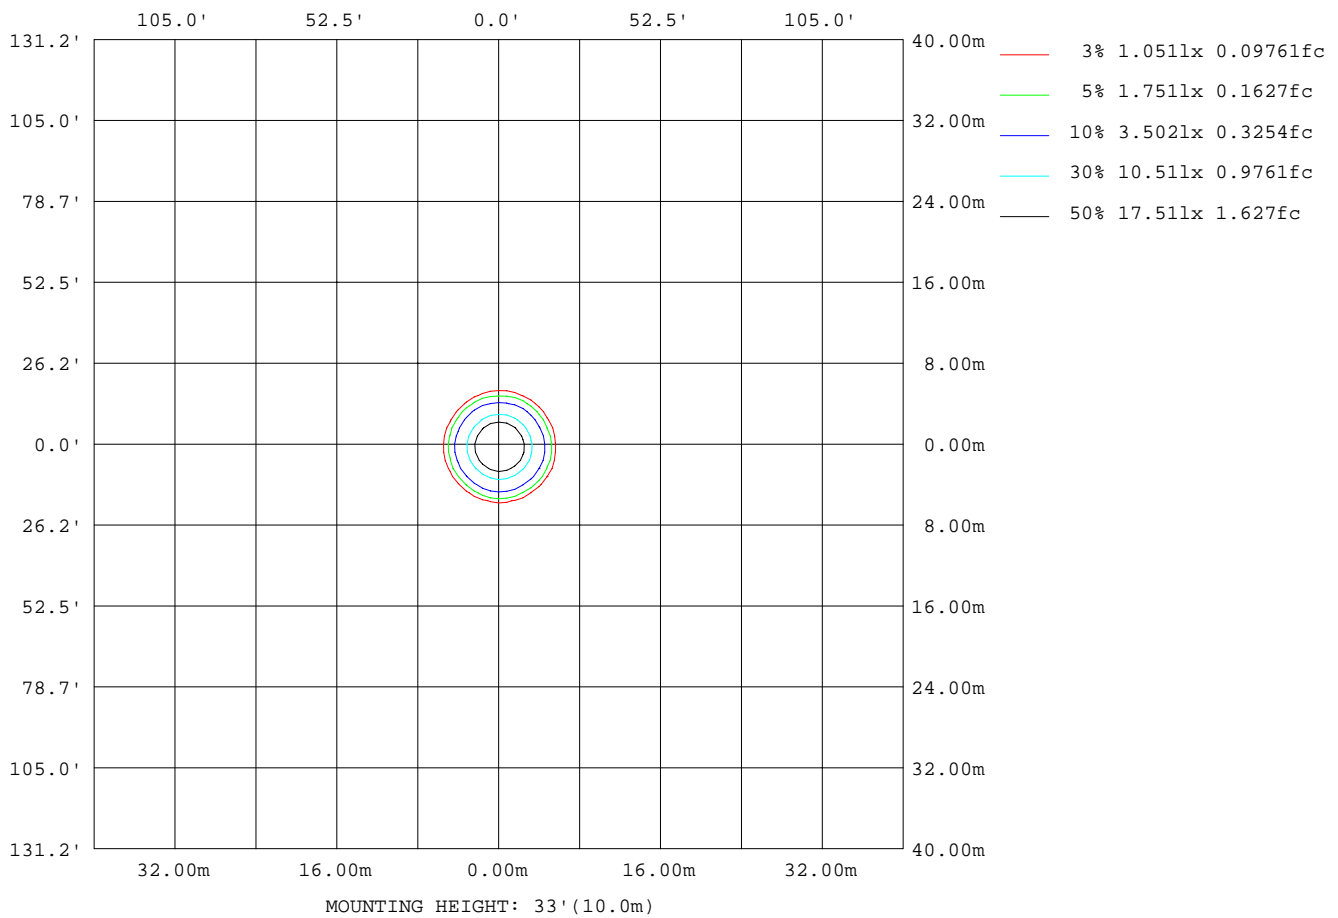

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:WEIJIE
Test Date:2023-06-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:9.420m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.00V I:0.1010A P:14.150W PF:0.9580 Freq:50.00Hz Lamp Flux:940.669x1 lm		
NAME: MQT-LED0515-X	TYPE: LED 4000K	WEIGHT: N/A
SPEC.: MQT-LED0515-X	DIM.: 85*95MM	SERIAL No.: 20
MFR.:	SUR.: 0.06	Shielding Angle: N/A


AvgL	cd/m2
L_0~180(65)av	0
L_0~180(75)av	0
L_0~180(85)av	0
L_90~270(65)av	0
L_90~270(75)av	0
L_90~270(85)av	0
L_45(65)av	0
L_45(75)av	0
L_45(85)av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:WEIJIE
 Test Date:2023-06-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:9.420m [K=1.0000]
 Remarks:

Planar Illuminance Curve

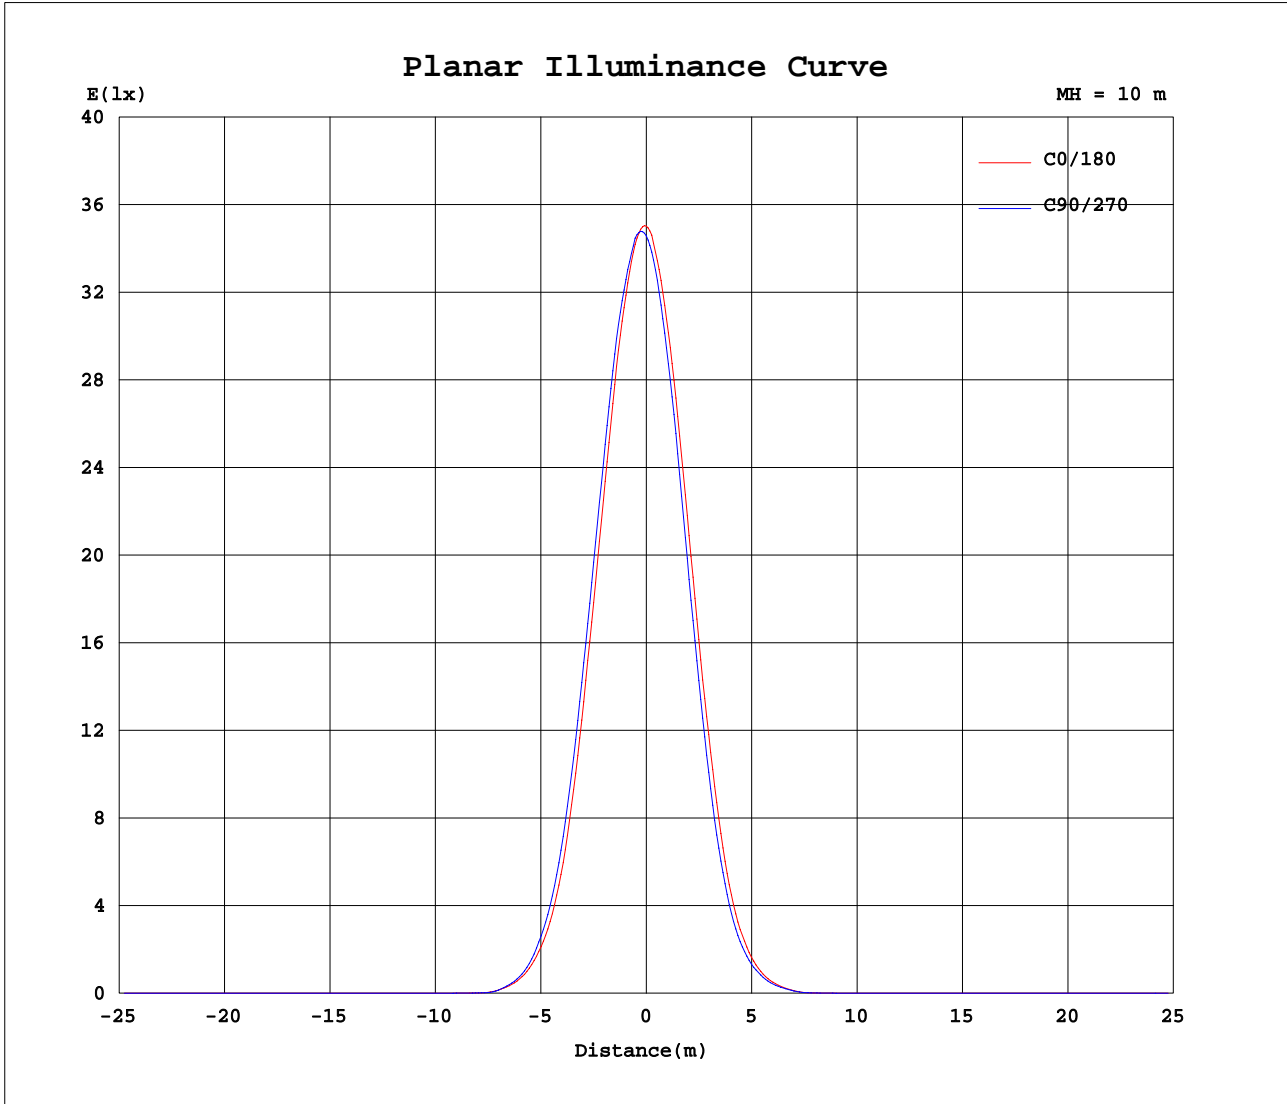

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: WEIJIE
 Test Date: 2023-06-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 9.420m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.00V I:0.1010A P:14.150W PF:0.9580 Freq:50.00Hz Lamp Flux:940.669x1 lm		
NAME: MQT-LED0515-X	TYPE: LED 4000K	WEIGHT: N/A
SPEC.: MQT-LED0515-X	DIM.: 85*95MM	SERIAL No.: 20
MFR.:	SUR.: 0.06	Shielding Angle: N/A

Table--1

UNIT: cd

C(DEG)\ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	3502	3485	3479	3457	3448	3431	3502	3485	3479	3457	3448	3431							
5	3280	3340	3365	3342	3276	3188	3176	3092	3055	3049	3088	3145							
10	2633	2767	2800	2803	2685	2562	2476	2326	2290	2278	2363	2455							
15	1784	1938	1972	1976	1842	1709	1588	1438	1407	1394	1484	1595							
20	951	1088	1106	1116	993	895	800	695	676	665	732	815							
25	395	470	478	484	411	362	320	266	258	255	291	326							
30	134	161	158	158	133	116	103	87.9	86.4	86.3	98.6	111							
35	27.7	33.3	25.9	27.2	20.6	21.6	21.8	18.6	19.3	19.8	24.6	25.1							
40	2.95	3.04	2.84	2.82	2.48	2.62	2.60	2.47	2.43	2.46	2.81	2.84							
45	0.89	0.90	0.81	0.75	0.69	0.72	0.75	0.67	0.68	0.67	0.79	0.83							
50	0.34	0.30	0.31	0.27	0.31	0.30	0.30	0.32	0.26	0.29	0.27	0.33							
55	0.09	0.06	0.06	0.00	0.06	0.02	0.05	0.07	0.00	0.05	0.02	0.08							
60	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00	0.00	0.00	0.01							
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
130	0.00	0.02	0.00	0.02	0.00	0.03	0.05	0.02	0.10	0.01	0.05	0.00							
135	0.11	0.24	0.08	0.13	0.15	1.10	0.25	0.26	0.31	0.23	0.25	0.17							
140	0.43	0.62	0.38	0.40	0.57	1.91	0.90	0.72	0.74	0.70	0.67	0.56							
145	1.01	0.94	0.88	0.92	0.96	1.09	1.38	1.41	1.47	1.49	1.38	1.22							
150	1.88	1.76	1.69	1.72	1.81	1.94	2.34	2.40	2.46	2.56	2.36	2.21							
155	2.89	2.76	2.70	2.71	2.83	2.92	3.43	3.43	3.54	3.78	3.41	3.40							
160	3.83	3.72	3.77	3.78	3.82	3.83	4.30	4.25	4.43	4.77	4.40	4.21							
165	4.56	4.47	4.54	4.60	4.58	4.45	4.65	4.68	4.77	5.04	4.96	4.59							
170	4.94	5.04	4.86	4.83	5.25	4.78	4.85	4.81	4.73	4.79	4.90	4.67							
175	5.23	5.27	5.50	5.03	5.35	4.97	5.13	4.93	4.83	4.74	4.93	4.70							
180	5.49	5.06	5.42	5.25	5.04	4.85	5.50	5.01	5.43	5.25	5.04	4.83							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:WEIJIE
 Test Date:2023-06-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:9.420m [K=1.0000]
 Remarks: