


室内灯具光度数据


实测参数: U:220.05V I:0.0992A P:20.947W PF:0.9595 Freq:0Hz 实检光通: 1856.76x1 lm		
灯具名称: MQT-LED0516-P3	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQT-LED0516-P3	外型尺寸: 220*120*62MM	测试编号: 2
制造厂商:	发光口面: 0.19*0.09	遮光角: N/A

光源数据		光度数据				光效: 88.64 lm/W
2*SP106 403H0212 1208MA 4000K		峰值光强(cd)	2538	S/MH(C0/180)	0.82	
标称功率(W)	20.9472	灯具效率(%)	100.0	S/MH(C90/270)	0.85	
额定电源电压(V)	220	总光通量(lm)	1856.8	η UP, DN(C0-180)	0.2, 47.0	
额定光通量(lm)	1856.76	CIE分类	直接	η UP, DN(C180-360)	0.2, 52.6	
灯具内光源数(只)	1	上射光通比(%)	0.4	CIBSE SHR NOM	0.75	
实测电源电压(V)	220.1	下射光通比(%)	99.6	CIBSE SHR MAX	0.85	

室内灯具配光曲线

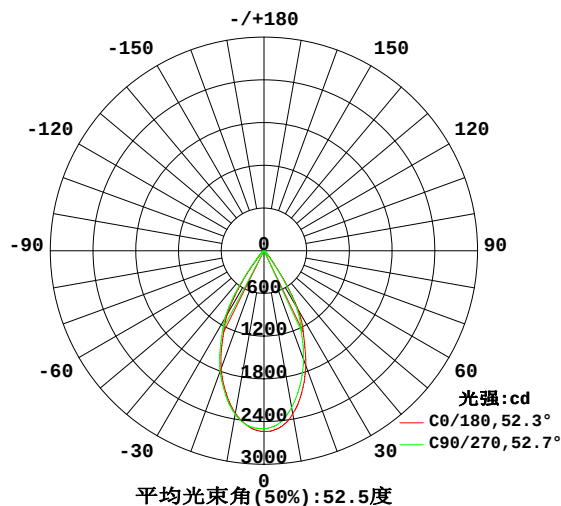

空间等照度曲线(单位: lx)

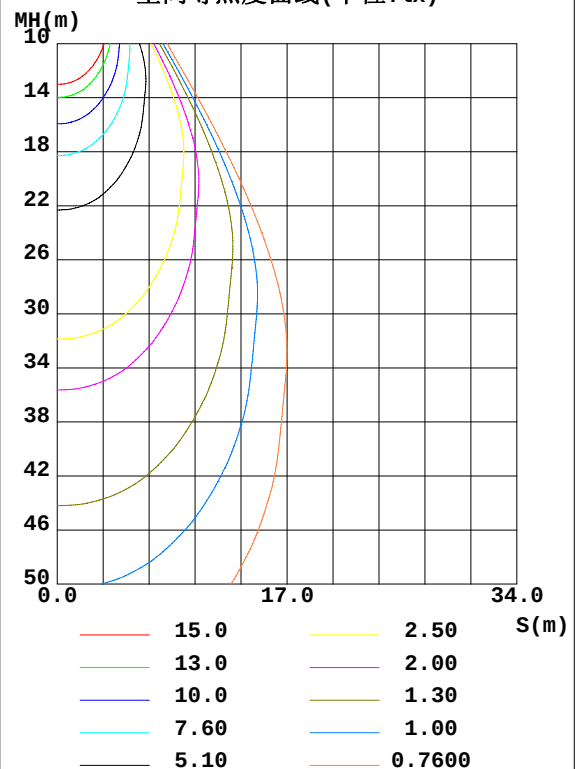

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2022-12-29

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 9.420米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:

γ	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	Φ 环	Φ 总	%lum, lamp
10	2328	2273	2234	2228	2319	2325	2332	2313	0- 10	229.2	229.2	12.3, 12.3
20	1717	1655	1626	1644	1761	1794	1802	1758	10- 20	564.8	793.9	42.8, 42.8
30	957.1	904.5	898.9	929.3	1039	1084	1103	1050	20- 30	615.0	1409	75.9, 75.9
40	143.3	127.8	124.7	132.0	174.2	217.1	208.2	170.6	30- 40	317.3	1726	93, 93
50	39.77	37.99	37.25	39.57	45.14	47.94	46.60	42.95	40- 50	62.35	1789	96.3, 96.3
60	24.94	25.78	24.23	25.95	25.41	28.10	26.71	27.01	50- 60	29.45	1818	97.9, 97.9
70	11.07	16.11	15.01	15.38	11.00	17.75	17.63	18.13	60- 70	21.12	1839	99.1, 99.1
80	1.810	1.617	4.608	1.454	1.454	2.980	6.999	3.058	70- 80	8.110	1847	99.5, 99.5
90	0.0010	0.0027	0	0.0000	0	0.0491	0.1792	0.1328	80- 90	1.164	1848	99.6, 99.6
100	0.0051	0.0392	0.0157	0.0260	0.0834	0.0130	0	0.0079	90-100	0.0123	1848	99.6, 99.6
110	0.0886	0.1147	0.0731	0.0938	0.1149	0.0964	0.0155	0.0861	100-110	0.0660	1849	99.6, 99.6
120	0.2281	0.2709	0.2558	0.2005	0.2245	0.1773	0.1404	0.1773	110-120	0.1271	1849	99.6, 99.6
130	0.8171	0.9720	0.9863	0.8597	0.8406	0.7848	0.7495	0.8081	120-130	0.4097	1849	99.6, 99.6
140	2.224	2.343	2.342	2.179	2.275	2.208	2.131	2.338	130-140	1.147	1850	99.6, 99.6
150	3.850	3.990	3.990	3.774	3.953	4.105	3.773	4.150	140-150	1.927	1852	99.8, 99.8
160	5.290	5.583	5.464	5.260	5.350	5.703	5.254	5.670	150-160	2.186	1854	99.9, 99.9
170	6.791	7.173	7.231	6.678	6.720	6.946	6.870	6.876	160-170	1.751	1856	100, 100
180	7.491	7.436	7.340	7.308	7.569	7.447	7.282	7.311	170-180	0.6808	1857	100, 100
单位:°	光强:cd									单位:lm		

锥面光通量(90度): 1766.9 lm

%lum = 95.2%

%lamp = 95.2%

锥面光通量(120度): 1818.1 lm

%lum = 97.9%


%lamp = 97.9%

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: WEIJIE
 测试日期: 2022-12-29

γ 角度范围: 0度 - 180度
 γ 角度间隔: 0.5度
 测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
 环境湿度: 65.0%
 测试距离: 9.420米 [K=1.0000]
 备注:

灯具亮度限制曲线

实测参数: U:220.05V I:0.0992A P:20.947W PF:0.9595 Freq:0Hz 实检光通: 1856.76x1 lm		
灯具名称: MQT-LED0516-P3	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQT-LED0516-P3	外型尺寸: 220*120*62MM	测试编号: 2
制造厂商:	发光口面: 0.19*0.09	遮光角: N/A

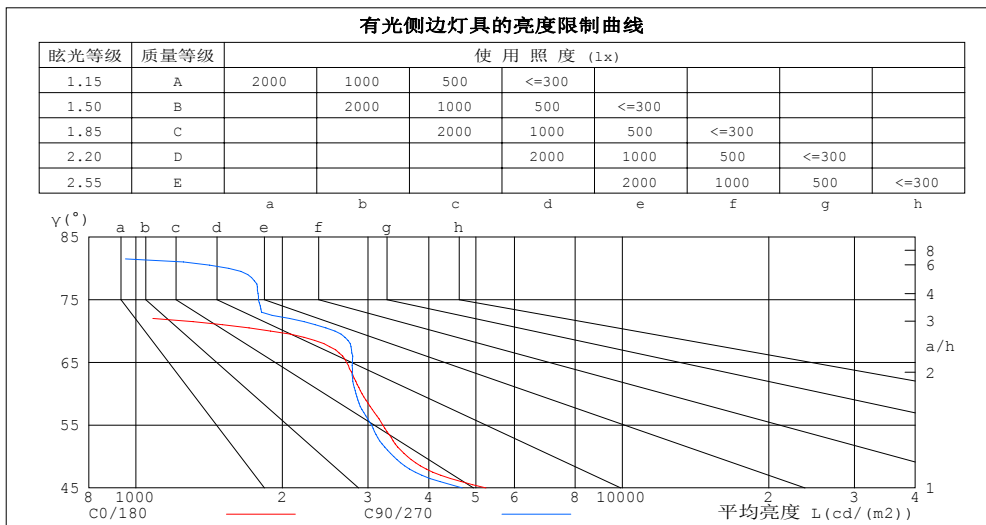

平均亮度值 cd/(m2)		
$\gamma(^{\circ})$	C0/180	C90/270
85	649	430
80	609	1552
75	500	1786
70	1893	2566
65	2711	2789
60	2917	2833
55	3219	3052
50	3618	3389
45	5242	4689


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2022-12-29

γ 角度范围: 0度 - 180度
 γ 角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 9.420米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:220.05V I:0.0992A P:20.947W PF:0.9595 Freq:0Hz 实检光通: 1856.76x1 lm		
灯具名称: MQT-LED0516-P3	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQT-LED0516-P3	外型尺寸: 220*120*62MM	测试编号: 2
制造厂商:	发光口面: 0.19*0.09	遮光角: N/A

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.08	1.06	1.04	1.04	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.96	1.01	.98	.95	.98	.95	.93	.95	.93	.91	.92	.90	.89	.87
3.0	.96	.92	.88	.95	.91	.87	.92	.89	.85	.90	.87	.84	.88	.85	.83	.81
4.0	.90	.85	.81	.89	.84	.80	.87	.83	.79	.85	.81	.78	.83	.80	.77	.76
5.0	.85	.79	.75	.84	.79	.75	.82	.78	.74	.80	.76	.73	.79	.75	.73	.71
6.0	.80	.74	.70	.79	.74	.70	.78	.73	.69	.76	.72	.69	.75	.71	.68	.67
7.0	.75	.70	.66	.75	.69	.65	.74	.69	.65	.72	.68	.65	.71	.67	.64	.63
8.0	.71	.66	.62	.71	.65	.62	.70	.65	.61	.69	.64	.61	.68	.64	.61	.59
9.0	.68	.62	.58	.67	.62	.58	.66	.61	.58	.65	.61	.58	.64	.60	.57	.56
10.0	.64	.59	.55	.64	.58	.55	.63	.58	.55	.62	.58	.55	.61	.57	.54	.53

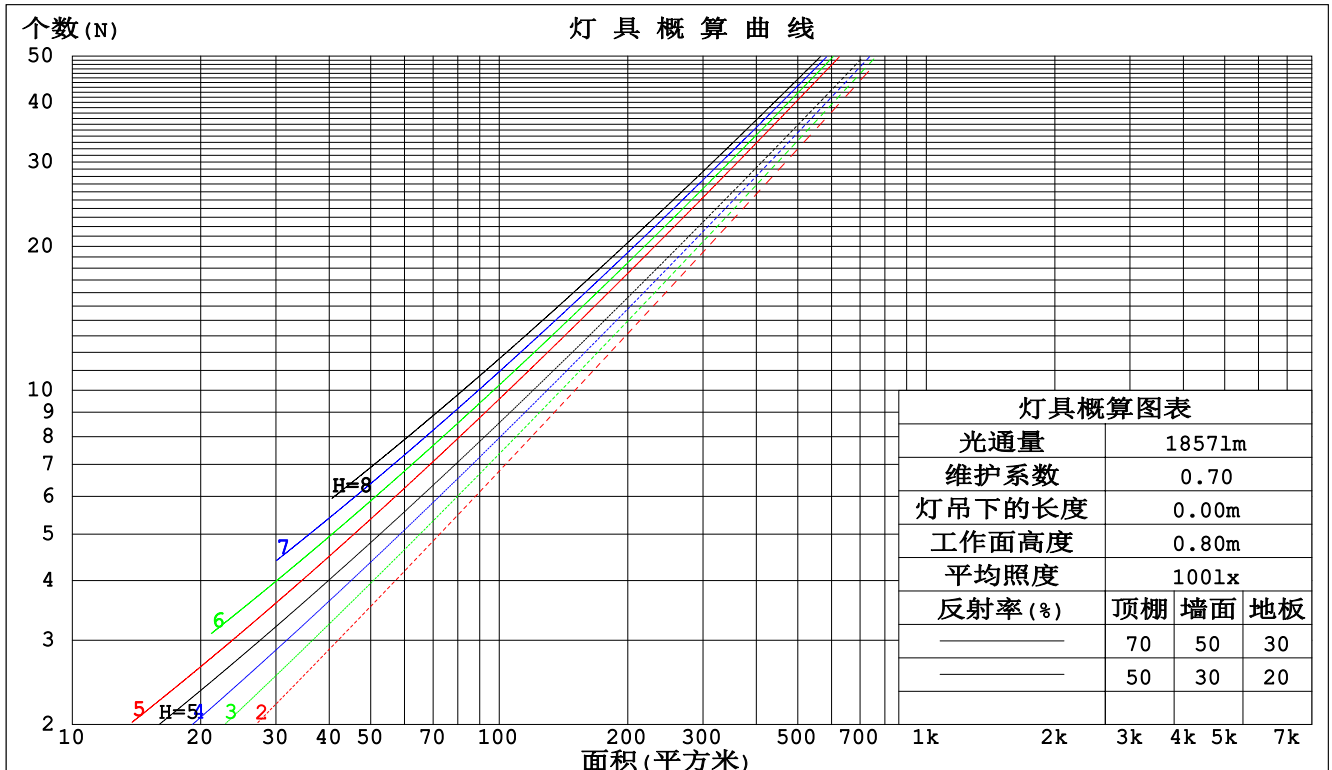

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2022-12-29

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 9.420米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:220.05V I:0.0992A P:20.947W PF:0.9595 Freq:0Hz		
实检光通: 1856.76x1 lm		
灯具名称: MQT-LED0516-P3	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQT-LED0516-P3	外型尺寸: 220*120*62MM	测试编号: 2
制造厂商:	发光口面: 0.19*0.09	遮光角: N/A

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.177	.101	.032	.170	.097	.031	.157	.090	.029	.146	.084	.027	.135	.078	.025	
2.0	.169	.092	.028	.163	.090	.028	.152	.085	.026	.142	.080	.025	.133	.075	.024	
3.0	.160	.085	.026	.155	.083	.025	.146	.079	.024	.137	.075	.023	.129	.072	.022	
4.0	.152	.079	.023	.148	.077	.023	.140	.074	.022	.132	.071	.021	.125	.068	.021	
5.0	.144	.074	.021	.141	.072	.021	.134	.070	.021	.127	.067	.020	.121	.065	.019	
6.0	.138	.069	.020	.134	.068	.020	.128	.066	.019	.123	.064	.019	.117	.062	.018	
7.0	.131	.065	.018	.128	.064	.018	.123	.062	.018	.118	.060	.018	.113	.059	.017	
8.0	.126	.061	.017	.123	.061	.017	.118	.059	.017	.114	.058	.017	.109	.056	.016	
9.0	.120	.058	.016	.118	.057	.016	.114	.056	.016	.110	.055	.016	.106	.054	.016	
10.0	.115	.055	.015	.113	.055	.015	.109	.054	.015	.106	.052	.015	.102	.051	.015	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.175	.161	.148	.149	.138	.128	.102	.095	.088	.059	.055	.051	.019	.018	.017	
2.0	.159	.136	.116	.136	.117	.101	.094	.081	.070	.054	.047	.041	.017	.015	.013	
3.0	.147	.117	.093	.126	.101	.081	.086	.070	.057	.050	.041	.033	.016	.013	.011	
4.0	.136	.102	.076	.117	.088	.066	.080	.062	.047	.047	.036	.028	.015	.012	.009	
5.0	.128	.091	.063	.110	.078	.055	.075	.055	.039	.044	.032	.023	.014	.011	.008	
6.0	.120	.081	.054	.103	.070	.047	.071	.049	.033	.041	.029	.020	.013	.009	.006	
7.0	.113	.074	.046	.098	.064	.040	.067	.045	.028	.039	.026	.017	.013	.009	.006	
8.0	.108	.068	.040	.093	.059	.035	.064	.041	.025	.037	.024	.015	.012	.008	.005	
9.0	.103	.062	.035	.088	.054	.031	.061	.038	.022	.036	.022	.013	.012	.007	.004	
10.0	.098	.058	.031	.084	.050	.027	.059	.035	.019	.034	.021	.012	.011	.007	.004	

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2022-12-29

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 9.420米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:220.05V I:0.0992A P:20.947W PF:0.9595 Freq:0Hz 实检光通: 1856.76x1 lm										
灯具名称: MQT-LED0516-P3					灯具类型: LED 4000K			灯具重量: N/A		
灯具规格: MQT-LED0516-P3					外型尺寸: 220*120*62MM			测试编号: 2		
制造厂商:					发光口面: 0.19*0.09			遮光角: N/A		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉 (Viewed crosswise)					向前 (Viewed endwise)				
x = 2H y = 2H	14.9	15.8	15.1	16.0	16.1	14.3	15.2	14.5	15.4	15.6
3H	15.0	15.8	15.2	16.0	16.2	14.5	15.4	14.8	15.6	15.8
4H	14.9	15.7	15.2	15.9	16.2	14.6	15.4	14.9	15.6	15.8
6H	14.8	15.6	15.1	15.8	16.1	14.6	15.3	14.9	15.6	15.8
8H	14.8	15.5	15.1	15.8	16.0	14.5	15.3	14.8	15.5	15.8
12H	14.7	15.4	15.1	15.7	16.0	14.5	15.2	14.8	15.5	15.7
4H 2H	14.8	15.6	15.1	15.8	16.1	14.3	15.1	14.5	15.3	15.5
3H	15.0	15.7	15.3	15.9	16.2	14.6	15.3	15.0	15.6	15.9
4H	14.9	15.5	15.3	15.8	16.2	14.7	15.3	15.1	15.6	16.0
6H	14.8	15.4	15.2	15.7	16.1	14.7	15.3	15.1	15.6	16.0
8H	14.8	15.3	15.2	15.6	16.0	14.7	15.2	15.1	15.6	15.9
12H	14.7	15.2	15.1	15.6	16.0	14.6	15.1	15.0	15.5	15.9
8H 4H	14.8	15.3	15.2	15.7	16.1	14.6	15.1	15.0	15.5	15.9
6H	14.7	15.2	15.2	15.6	16.0	14.6	15.1	15.1	15.5	15.9
8H	14.7	15.1	15.1	15.5	15.9	14.6	15.0	15.1	15.4	15.8
12H	14.7	15.0	15.1	15.4	15.9	14.5	14.9	15.0	15.3	15.8
12H 4H	14.8	15.2	15.2	15.6	16.0	14.6	15.0	15.0	15.4	15.8
6H	14.7	15.1	15.1	15.5	15.9	14.6	15.0	15.0	15.4	15.8
8H	14.6	15.0	15.1	15.4	15.9	14.5	14.9	15.0	15.3	15.8
不同间隔布灯时, 观察者位置引起的UGR变化 (CIE Pub.117):										
S = 1.0H	+ 2.7 / - 2.6					+ 2.1 / - 1.8				
1.5H	+ 4.6 / - 2.4					+ 3.9 / - 1.7				
2.0H	+ 1.5 / - 1.0					+ 0.9 / - 0.5				

依据CIE Pub.117计算, 1857lm光源光通, 表格已经进行修正 ($8\log(F/F_0) = 2.2$)。
出光口面积: 0.0171 m²

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2022-12-29

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 9.420米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:220.05V I:0.0992A P:20.947W PF:0.9595 Freq:0Hz 实检光通: 1856.76x1 lm		
灯具名称: MQT-LED0516-P3	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQT-LED0516-P3	外型尺寸: 220*120*62MM	测试编号: 2
制造厂商:	发光口面: 0.19*0.09	遮光角: N/A


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	87	81	77	87	81	77	86	80	77	73
0.80	95	89	85	94	88	85	93	88	84	81
1.00	99	93	90	98	93	89	96	93	89	85
1.25	103	98	94	102	97	94	100	96	93	89
1.50	106	101	97	104	100	97	102	99	96	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	112	108	105	110	107	104	106	104	102	95
4.00	114	111	109	112	109	107	108	106	104	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: WEIJIE
 测试日期: 2022-12-29

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.446
 环境湿度: 65.0%
 测试距离: 9.420米 [K=1.0000]
 备注:

灯具等光强曲线

实测参数: U:220.05V I:0.0992A P:20.947W PF:0.9595 Freq:0Hz 实检光通: 1856.76x1 lm		
灯具名称: MQT-LED0516-P3	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQT-LED0516-P3	外型尺寸: 220*120*62MM	测试编号: 2
制造厂商:	发光口面: 0.19*0.09	遮光角: N/A

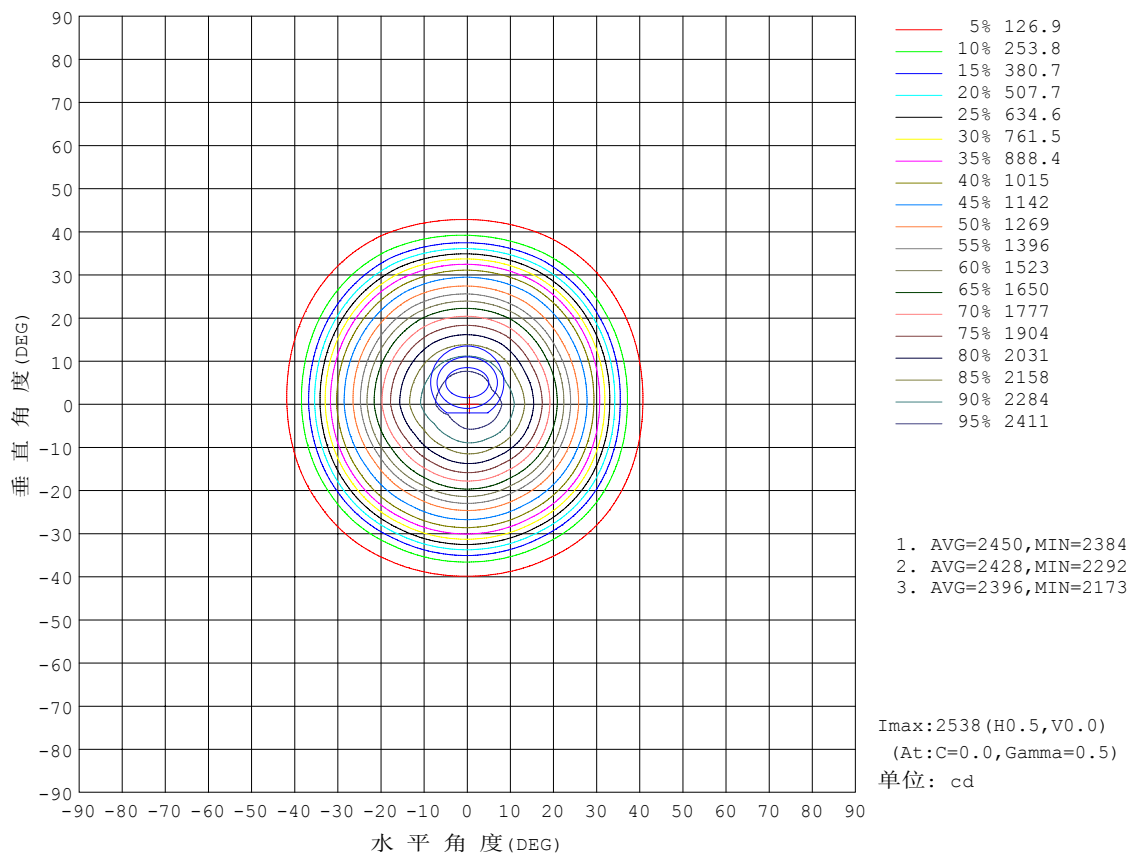


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2022-12-29

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 9.420米 [K=1.0000]
备注:

灯具有效平均照度图

实测参数: U:220.05V I:0.0992A P:20.947W PF:0.9595 Freq:0Hz 实检光通: 1856.76x1 lm		
灯具名称: MQT-LED0516-P3	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQT-LED0516-P3	外型尺寸: 220*120*62MM	测试编号: 2
制造厂商:	发光口面: 0.19*0.09	遮光角: N/A

光通输出: 1205 lm

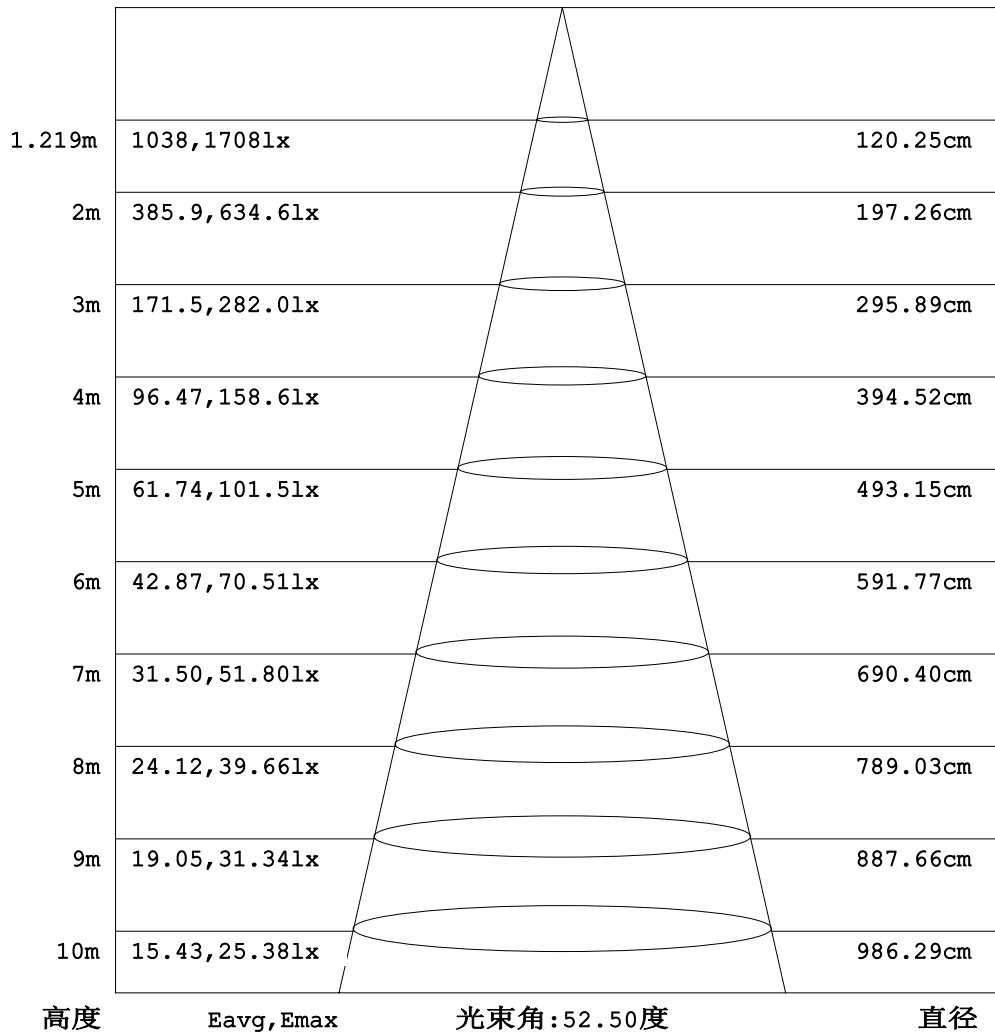


注: 曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: WEIJIE
 测试日期: 2022-12-29

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
 环境湿度: 65.0%
 测试距离: 9.420米 [K=1.0000]
 备注:

平面等照度曲线

实测参数: U:220.05V I:0.0992A P:20.947W PF:0.9595 Freq:0Hz 实检光通: 1856.76x1 lm		
灯具名称: MQT-LED0516-P3	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQT-LED0516-P3	外型尺寸: 220*120*62MM	测试编号: 2
制造厂商:	发光口面: 0.19*0.09	遮光角: N/A

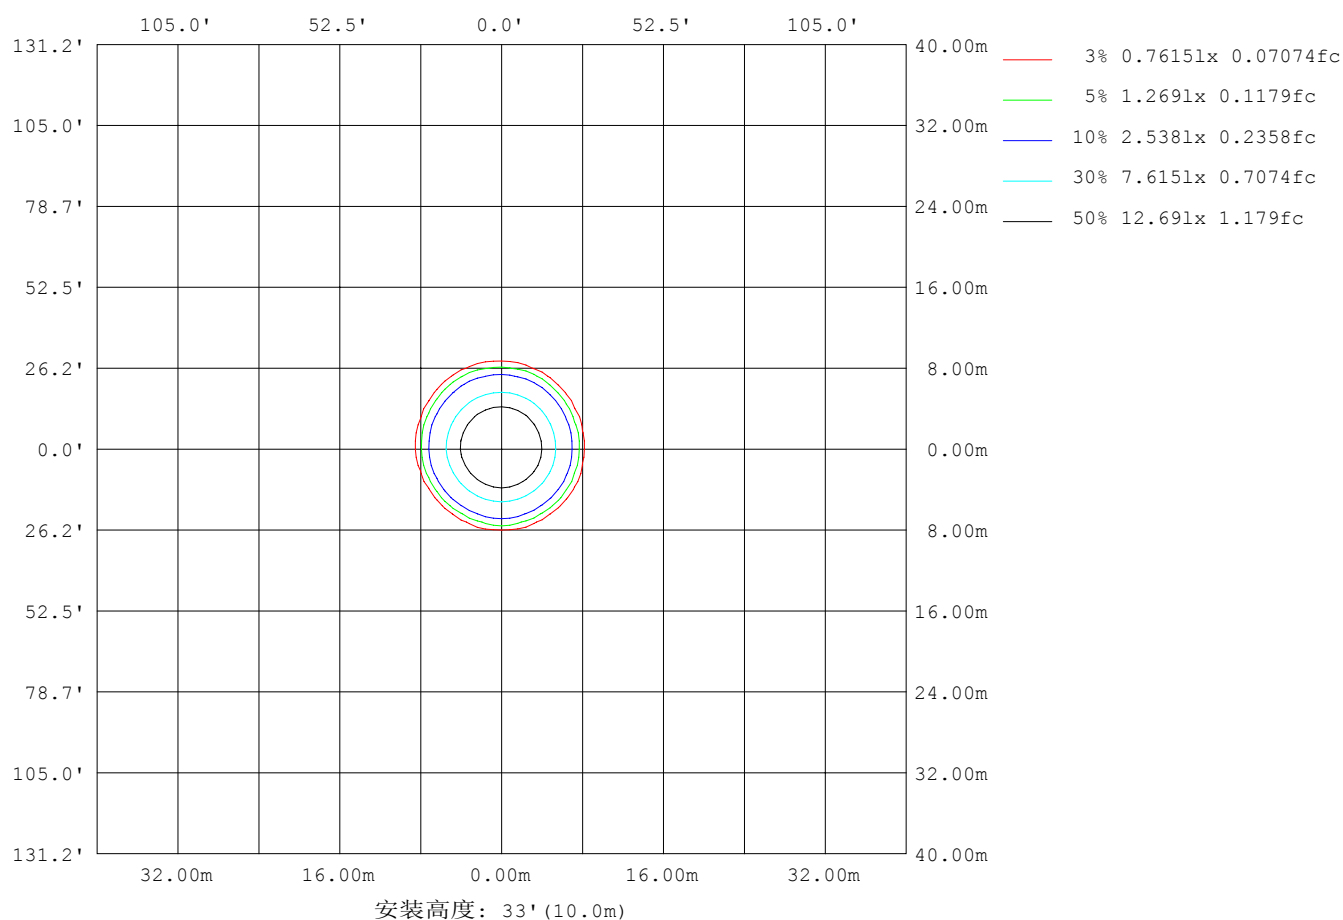

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2022-12-29

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 9.420米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:220.05V I:0.0992A P:20.947W PF:0.9595 Freq:0Hz 实检光通: 1856.76x1 lm		
灯具名称: MQT-LED0516-P3	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQT-LED0516-P3	外型尺寸: 220*120*62MM	测试编号: 2
制造厂商:	发光口面: 0.19*0.09	遮光角: N/A


平均亮度	数值(cd/m2)
L横(65)av	2685
L横(75)av	465
L横(85)av	597
L纵(65)av	2898
L纵(75)av	2061
L纵(85)av	510
L45(65)av	3096
L45(75)av	1589
L45(85)av	624

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2022-12-29

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 9.420米 [K=1.0000]
备注:

平面照度曲线

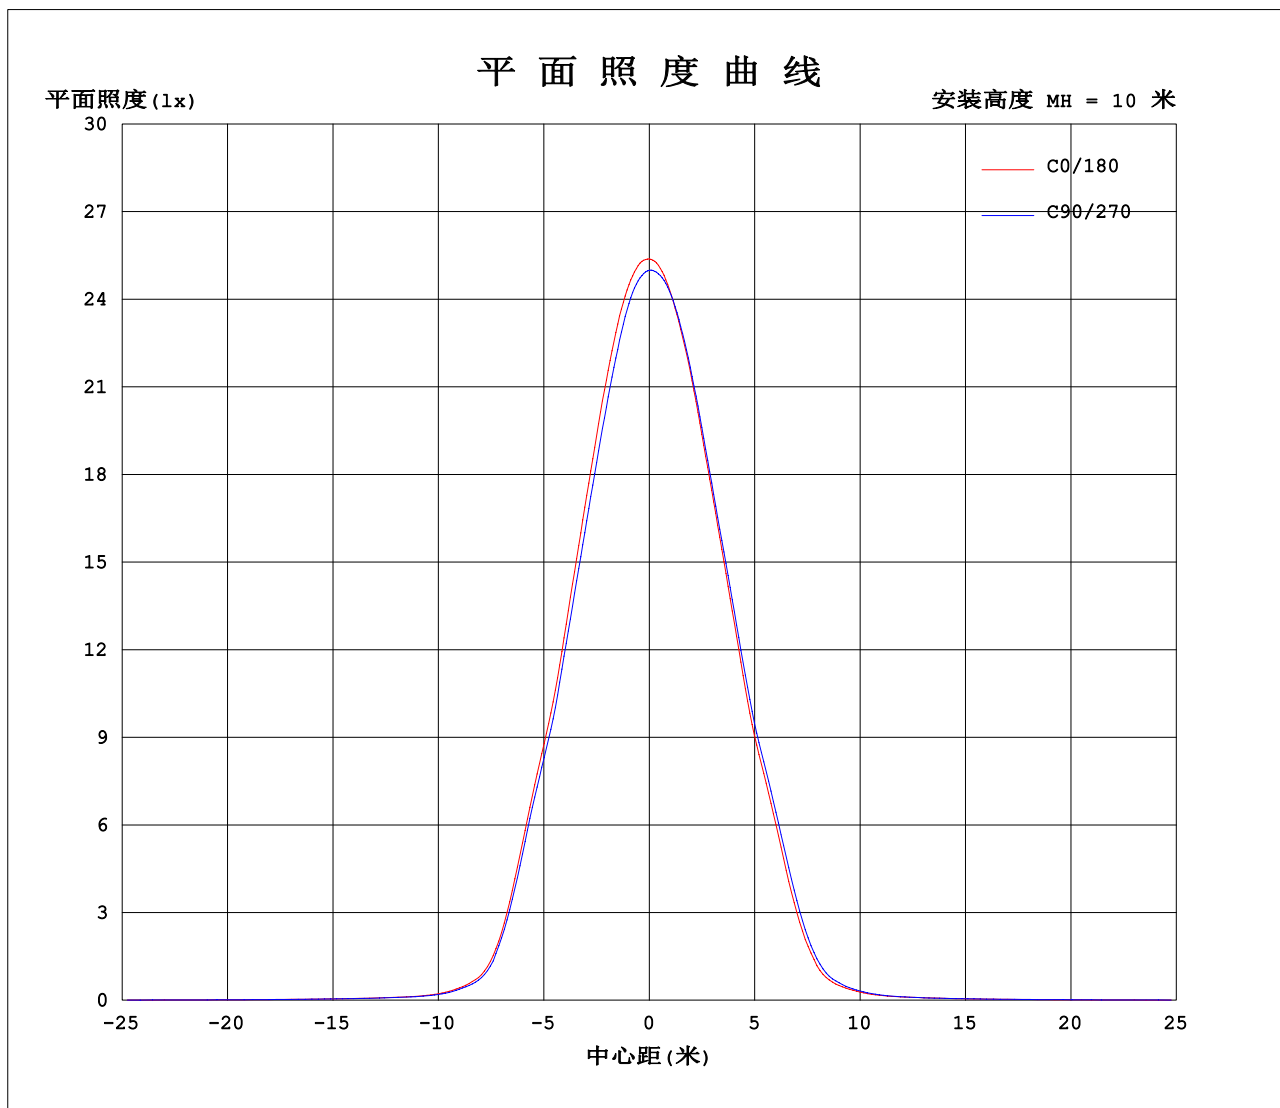

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2022-12-29

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 9.420米 [K=1.0000]
备注:

光强分布数据表格

实测参数: U:220.05V I:0.0992A P:20.947W PF:0.9595 Freq:0Hz 实检光通: 1856.76x1 lm		
灯具名称: MQT-LED0516-P3	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQT-LED0516-P3	外型尺寸: 220*120*62MM	测试编号: 2
制造厂商:	发光口面: 0.19*0.09	遮光角: N/A

表--1

单位: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2538	2523	2510	2499	2487	2477	2538	2523	2510	2499	2487	2477						
5	2495	2475	2448	2433	2414	2411	2479	2469	2473	2470	2462	2443						
10	2328	2299	2247	2234	2219	2237	2319	2317	2333	2332	2328	2297						
15	2057	2022	1964	1957	1945	1974	2066	2079	2097	2093	2089	2046						
20	1717	1681	1629	1626	1623	1665	1761	1782	1807	1802	1787	1730						
25	1321	1285	1246	1247	1240	1278	1376	1415	1450	1439	1406	1338						
30	957	929	880	899	900	959	1039	1063	1106	1103	1086	1013						
35	422	411	369	390	384	453	546	592	642	620	584	496						
40	143	133	122	125	126	138	174	205	230	208	185	157						
45	63.4	61.2	56.3	56.7	57.8	66.1	79.8	87.7	96.2	90.1	83.5	71.1						
50	39.8	38.9	37.0	37.2	38.2	40.9	45.1	46.9	49.0	46.6	45.0	40.9						
55	31.6	31.5	30.0	29.9	30.8	32.7	33.8	35.1	35.2	33.7	33.3	32.2						
60	24.9	26.2	25.4	24.2	25.7	26.2	25.4	27.7	28.5	26.7	27.4	26.7						
65	19.6	21.5	21.9	20.2	21.9	20.9	19.2	21.6	23.8	21.7	23.3	22.2						
70	11.1	14.8	17.4	15.0	17.0	13.7	11.0	15.7	19.8	17.6	19.5	16.7						
75	2.21	2.57	7.55	7.90	7.29	2.17	1.90	4.75	12.7	10.3	12.8	5.14						
80	1.81	1.64	1.59	4.61	1.53	1.38	1.45	1.49	4.47	7.00	4.38	1.74						
85	0.97	0.94	0.80	0.64	0.63	0.73	0.81	1.01	0.99	0.88	1.08	1.17						
90	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.09	0.18	0.17	0.10						
95	0.00	0.02	0.00	0.01	0.00	0.03	0.04	0.00	0.00	0.00	0.00	0.01						
100	0.01	0.08	0.00	0.02	0.00	0.05	0.08	0.01	0.02	0.00	0.01	0.01						
105	0.08	0.11	0.08	0.05	0.06	0.09	0.10	0.07	0.09	0.00	0.07	0.03						
110	0.09	0.14	0.09	0.07	0.09	0.10	0.11	0.08	0.11	0.02	0.09	0.08						
115	0.10	0.17	0.14	0.14	0.10	0.14	0.15	0.09	0.13	0.08	0.13	0.09						
120	0.23	0.27	0.27	0.26	0.21	0.19	0.22	0.16	0.20	0.14	0.20	0.16						
125	0.41	0.50	0.54	0.53	0.44	0.40	0.43	0.37	0.39	0.34	0.40	0.40						
130	0.82	0.95	0.99	0.99	0.91	0.81	0.84	0.79	0.78	0.75	0.80	0.81						
135	1.46	1.60	1.60	1.61	1.47	1.41	1.47	1.44	1.35	1.32	1.40	1.48						
140	2.22	2.36	2.33	2.34	2.22	2.14	2.27	2.31	2.10	2.13	2.29	2.39						
145	3.01	3.09	3.18	3.13	3.01	2.92	3.13	3.26	3.01	2.94	3.26	3.26						
150	3.85	3.93	4.05	3.99	3.81	3.73	3.95	4.24	3.97	3.77	4.14	4.16						
155	4.60	4.81	4.84	4.87	4.61	4.52	4.75	5.10	4.79	4.59	5.01	4.99						
160	5.29	5.57	5.59	5.46	5.34	5.18	5.35	5.82	5.58	5.25	5.74	5.60						
165	6.08	6.45	6.50	6.36	6.23	5.92	6.05	6.60	6.29	6.25	6.64	6.11						
170	6.79	7.20	7.15	7.23	6.75	6.61	6.72	7.09	6.80	6.87	7.15	6.60						
175	7.26	7.33	7.50	7.48	7.08	7.04	7.22	7.41	7.14	7.02	7.39	7.08						
180	7.49	7.51	7.36	7.34	7.33	7.29	7.57	7.50	7.40	7.28	7.37	7.26						

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: WEIJIE

测试日期: 2022-12-29

γ角度范围: 0度 - 180度

γ角度间隔: 0.5度

测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446

环境湿度: 65.0%

测试距离: 9.420米 [K=1.0000]

备注: