



实测参数: U:219.90V I:0.1780A P:38.450W PF:0.9750 Freq:50.00Hz 实检光通: 4758.46x1 lm		
灯具名称: MQG-LED-151L-L	灯具类型:LED 6500K	灯具重量: N/A
灯具规格: MQG-LED-151L-L	外型尺寸: 1195*595*32MM	测试编号: 21
制造厂商:	发光口面: 1.155*0.55	遮光角: N/A

室内灯具配光曲线

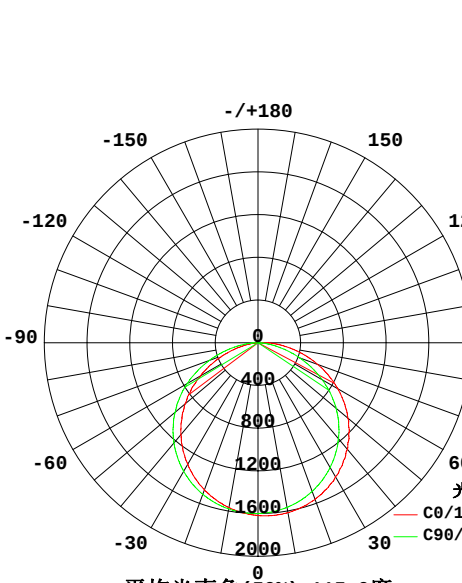

平均光束角(50%): 115.0度

空间等照度曲线(单位:lx)

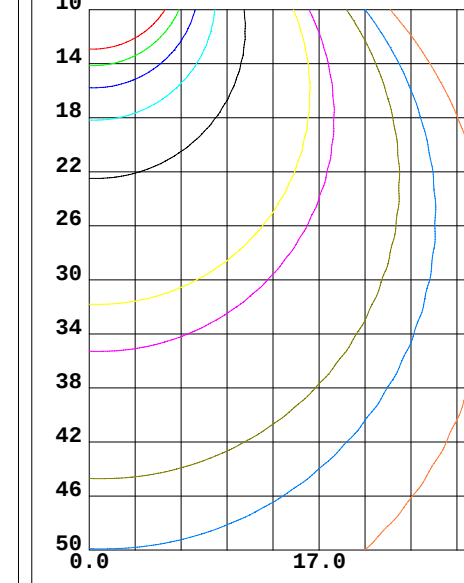

9.70	1.60
8.10	1.30
6.50	0.8100
4.90	0.6500
3.20	0.4900

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 8.600米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:

γ	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	Φ 环	Φ 总	%lum, lamp
10	1615	1601	1566	1540	1567	1562	1580	1607	0- 10	152.0	152.0	3.19, 3.19
20	1562	1542	1482	1431	1467	1465	1511	1562	10- 20	436.6	588.6	12.4, 12.4
30	1451	1433	1350	1275	1315	1320	1392	1466	20- 30	665.7	1254	26.4, 26.4
40	1302	1277	1172	1076	1123	1131	1224	1321	30- 40	809.6	2064	43.4, 43.4
50	1101	1078	955.0	841.6	891.1	898.9	1014	1130	40- 50	848.4	2912	61.2, 61.2
60	863.3	837.8	696.5	571.0	622.2	637.4	764.8	900.5	50- 60	774.0	3686	77.5, 77.5
70	594.4	568.0	416.3	294.3	351.9	357.2	486.0	635.1	60- 70	594.5	4281	90, 90
80	320.4	289.5	154.3	62.33	100.8	104.7	209.6	354.0	70- 80	346.3	4627	97.2, 97.2
90	79.18	58.56	0.4208	0.5571	0.5088	0.4578	5.807	102.6	80- 90	113.6	4741	99.6, 99.6
100	0.5778	0.5686	0.7353	0.9015	0.8604	0.7397	0.5407	0.4840	90-100	10.41	4751	99.8, 99.8
110	0.9288	0.9338	1.091	1.220	1.202	1.036	0.8689	0.7628	100-110	0.8840	4752	99.9, 99.9
120	1.229	1.276	1.420	1.480	1.387	1.274	1.165	1.080	110-120	1.134	4753	99.9, 99.9
130	1.451	1.591	1.715	1.655	1.614	1.454	1.391	1.373	120-130	1.267	4754	99.9, 99.9
140	1.682	1.858	1.849	1.773	1.822	1.602	1.576	1.595	130-140	1.254	4756	99.9, 99.9
150	1.905	2.025	1.910	1.889	2.039	1.766	1.706	1.808	140-150	1.124	4757	100, 100
160	2.168	2.141	2.057	2.018	2.261	1.953	1.872	2.032	150-160	0.9075	4758	100, 100
170	2.270	2.173	2.104	2.113	2.256	2.094	1.993	2.110	160-170	0.5967	4758	100, 100
180	2.247	2.161	2.104	2.124	2.251	2.152	2.062	2.110	170-180	0.2039	4758	100, 100
单位:°	光强:cd									单位:lm		

锥面光通量(90度): 2490.2 lm

%lum = 52.3%

%lamp = 52.3%

锥面光通量(120度): 3686.2 lm

%lum = 77.5%


%lamp = 77.5%

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2023-12-12

γ 角度范围: 0度 - 180度
 γ 角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 8.600米 [K=1.0000]
备注:

灯具亮度限制曲线

实测参数：U:219.90V I:0.1780A P:38.450W PF:0.9750 Freq:50.00Hz 实检光通：4758.46x1 lm		
灯具名称：MQG-LED-151L-L	灯具类型：LED 6500K	灯具重量：N/A
灯具规格：MQG-LED-151L-L	外型尺寸：1195*595*32MM	测试编号：21
制造厂商：	发光口面：1.155*0.55	遮光角：N/A

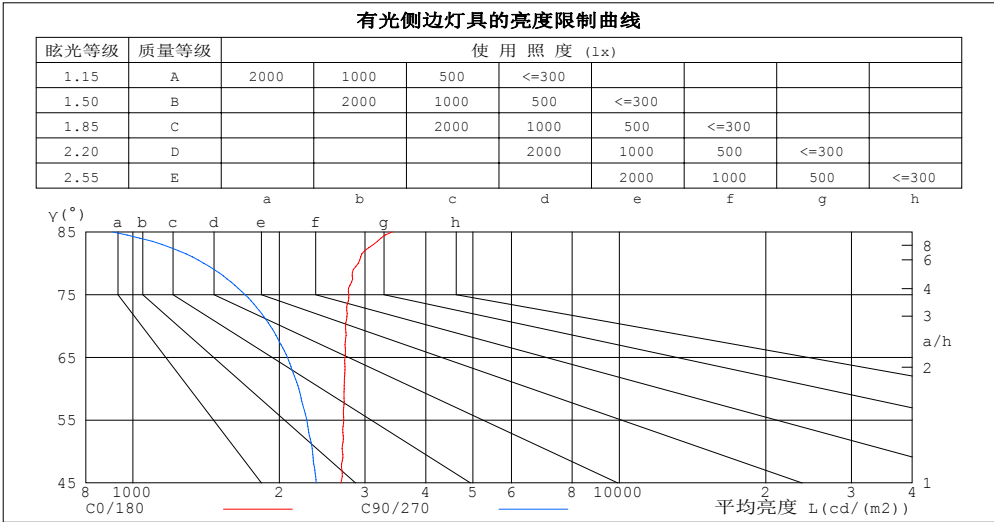

平均亮度值 cd/(m2)		
γ(°)	C0/180	C90/270
85	3414	909
80	2905	1400
75	2778	1701
70	2737	1917
65	2728	2078
60	2719	2194
55	2713	2278
50	2697	2340
45	2678	2381


C角度范围： 0度 - 360度
C角度间隔： 30.0度
测试速度：快速
环境温度:25.3℃
测试人员:WEIJIE
测试日期:2023-12-12

γ角度范围： 0度 - 180度
γ角度间隔： 0.5度
测试系统：远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度:65.0%
测试距离:8.600米 [K=1.0000]
备注：

工作面利用系数和灯具概算曲线

实测参数: U:219.90V I:0.1780A P:38.450W PF:0.9750 Freq:50.00Hz			实检光通: 4758.46x1 lm		
灯具名称: MQG-LED-151L-L		灯具类型:LED 6500K		灯具重量: N/A	
灯具规格: MQG-LED-151L-L		外型尺寸: 1195*595*32MM		测试编号: 21	
制造厂商:		发光口面: 1.155*0.55		遮光角: N/A	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.03	.99	.95	1.01	.97	.93	.97	.93	.90	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.81	.76	.84	.79	.74	.81	.76	.72	.78	.74	.71	.69
3.0	.79	.70	.64	.77	.69	.63	.74	.67	.62	.71	.66	.61	.69	.64	.60	.57
4.0	.70	.61	.54	.68	.60	.53	.66	.58	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.45	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.44	.39	.50	.44	.39	.37
7.0	.51	.42	.35	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.34	.32
8.0	.46	.37	.32	.45	.37	.31	.44	.37	.31	.43	.36	.31	.42	.35	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.25	.36	.30	.25	.36	.30	.25	.23

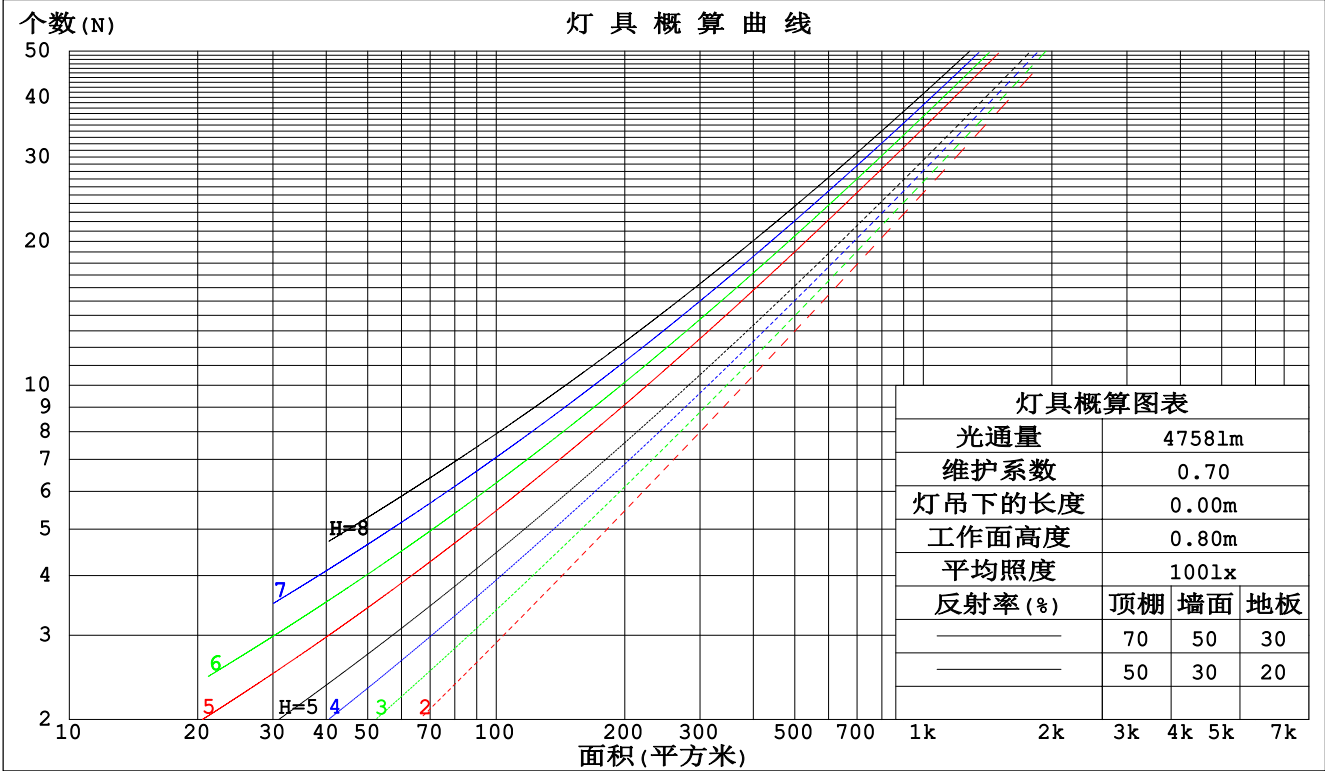

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2023-12-12

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 8.600米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:219.90V I:0.1780A P:38.450W PF:0.9750 Freq:50.00Hz		
实检光通: 4758.46x1 lm		
灯具名称: MQG-LED-151L-L	灯具类型: LED 6500K	灯具重量: N/A
灯具规格: MQG-LED-151L-L	外型尺寸: 1195*595*32MM	测试编号: 21
制造厂商:	发光口面: 1.155*0.55	遮光角: N/A

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.318	.181	.057	.310	.177	.056	.297	.170	.054	.284	.164	.053	.273	.158	.051	
2.0	.297	.163	.050	.290	.160	.049	.278	.155	.048	.267	.150	.047	.257	.145	.046	
3.0	.274	.146	.044	.268	.143	.043	.257	.139	.042	.248	.136	.042	.238	.132	.041	
4.0	.252	.131	.038	.247	.129	.038	.238	.126	.038	.229	.123	.037	.221	.120	.037	
5.0	.233	.118	.034	.228	.117	.034	.220	.114	.034	.212	.112	.033	.205	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.204	.105	.030	.197	.102	.030	.191	.100	.030	
7.0	.200	.099	.028	.197	.098	.028	.190	.096	.028	.184	.094	.027	.178	.093	.027	
8.0	.187	.091	.026	.184	.090	.026	.178	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.083	.023	.162	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.148	.075	.021	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.184	.159	.137	.157	.136	.118	.108	.094	.081	.062	.054	.047	.020	.017	.015	
2.0	.176	.135	.100	.151	.116	.087	.103	.080	.060	.059	.047	.035	.019	.015	.012	
3.0	.168	.117	.077	.144	.101	.066	.099	.070	.047	.057	.041	.027	.018	.013	.009	
4.0	.160	.104	.061	.138	.090	.053	.095	.063	.037	.055	.037	.022	.018	.012	.007	
5.0	.153	.094	.050	.131	.081	.043	.090	.057	.031	.052	.033	.018	.017	.011	.006	
6.0	.146	.085	.042	.125	.074	.036	.086	.052	.026	.050	.030	.015	.016	.010	.005	
7.0	.139	.078	.036	.119	.068	.031	.083	.048	.022	.048	.028	.013	.015	.009	.004	
8.0	.132	.073	.031	.114	.063	.027	.079	.044	.019	.046	.026	.012	.015	.009	.004	
9.0	.126	.068	.028	.109	.059	.024	.075	.041	.017	.044	.024	.010	.014	.008	.003	
10.0	.121	.063	.025	.104	.055	.022	.072	.039	.016	.042	.023	.009	.014	.008	.003	

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2023-12-12

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 8.600米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:219.90V I:0.1780A P:38.450W PF:0.9750 Freq:50.00Hz 实检光通: 4758.46x1 lm										
灯具名称: MQG-LED-151L-L			灯具类型: LED 6500K			灯具重量: N/A				
灯具规格: MQG-LED-151L-L			外型尺寸: 1195*595*32MM			测试编号: 21				
制造厂商:			发光口面: 1.155*0.55			遮光角: N/A				
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉 (Viewed crosswise)					向前 (Viewed endwise)				
x = 2H y = 2H	16.9	18.4	17.1	18.6	18.8	16.1	17.6	16.4	17.8	18.0
3H	18.7	20.1	19.0	20.4	20.6	17.5	18.9	17.8	19.2	19.4
4H	19.5	20.9	19.8	21.1	21.4	18.1	19.4	18.4	19.7	19.9
6H	20.2	21.5	20.6	21.8	22.1	18.4	19.7	18.8	20.0	20.3
8H	20.5	21.8	20.9	22.1	22.4	18.5	19.7	18.8	20.0	20.3
12H	20.8	22.0	21.2	22.3	22.6	18.5	19.7	18.9	20.0	20.3
4H 2H	17.5	18.9	17.8	19.1	19.4	16.9	18.3	17.2	18.5	18.8
3H	19.6	20.8	19.9	21.1	21.4	18.6	19.8	19.0	20.1	20.4
4H	20.6	21.6	20.9	22.0	22.3	19.3	20.4	19.7	20.7	21.0
6H	21.4	22.4	21.8	22.7	23.1	19.8	20.7	20.2	21.1	21.5
8H	21.8	22.7	22.2	23.1	23.5	19.9	20.8	20.3	21.2	21.6
12H	22.2	23.0	22.6	23.4	23.8	20.0	20.8	20.4	21.2	21.6
8H 4H	20.9	21.8	21.3	22.1	22.5	19.8	20.7	20.2	21.1	21.4
6H	22.0	22.7	22.4	23.1	23.6	20.5	21.2	20.9	21.6	22.1
8H	22.5	23.2	23.0	23.6	24.0	20.7	21.4	21.2	21.8	22.3
12H	23.0	23.6	23.5	24.0	24.5	20.9	21.5	21.4	21.9	22.4
12H 4H	20.9	21.7	21.3	22.1	22.5	19.9	20.7	20.3	21.1	21.5
6H	22.0	22.7	22.5	23.1	23.6	20.7	21.3	21.1	21.8	22.2
8H	22.6	23.2	23.1	23.7	24.2	21.0	21.6	21.5	22.0	22.5
不同间隔布灯时, 观察者位置引起的UGR变化 (CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.1 / - 0.4					+ 0.2 / - 0.5				

依据CIE Pub.117计算, 4758lm光源光通, 表格已经进行修正 ($8\log(F/F_0) = 5.4$)。
出光口面积: 0.635 m²

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2023-12-12

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 8.600米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:219.90V I:0.1780A P:38.450W PF:0.9750 Freq:50.00Hz 实检光通: 4758.46x1 lm		
灯具名称: MQG-LED-151L-L	灯具类型:LED 6500K	灯具重量: N/A
灯具规格: MQG-LED-151L-L	外型尺寸: 1195*595*32MM	测试编号: 21
制造厂商:	发光口面: 1.155*0.55	遮光角: N/A


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	47	64	54	47	40
1.00	75	64	57	74	63	56	72	65	56	48
1.25	82	72	64	81	71	64	78	69	63	56
1.50	87	77	70	86	76	70	83	75	69	61
2.00	94	86	79	92	84	78	89	82	77	69
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	99	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	97	101	98	94	85
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2023-12-12

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 8.600米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:219.90V I:0.1780A P:38.450W PF:0.9750 Freq:50.00Hz 实检光通: 4758.46x1 lm		
灯具名称: MQG-LED-151L-L	灯具类型: LED 6500K	灯具重量: N/A
灯具规格: MQG-LED-151L-L	外型尺寸: 1195*595*32MM	测试编号: 21
制造厂商:	发光口面: 1.155*0.55	遮光角: N/A

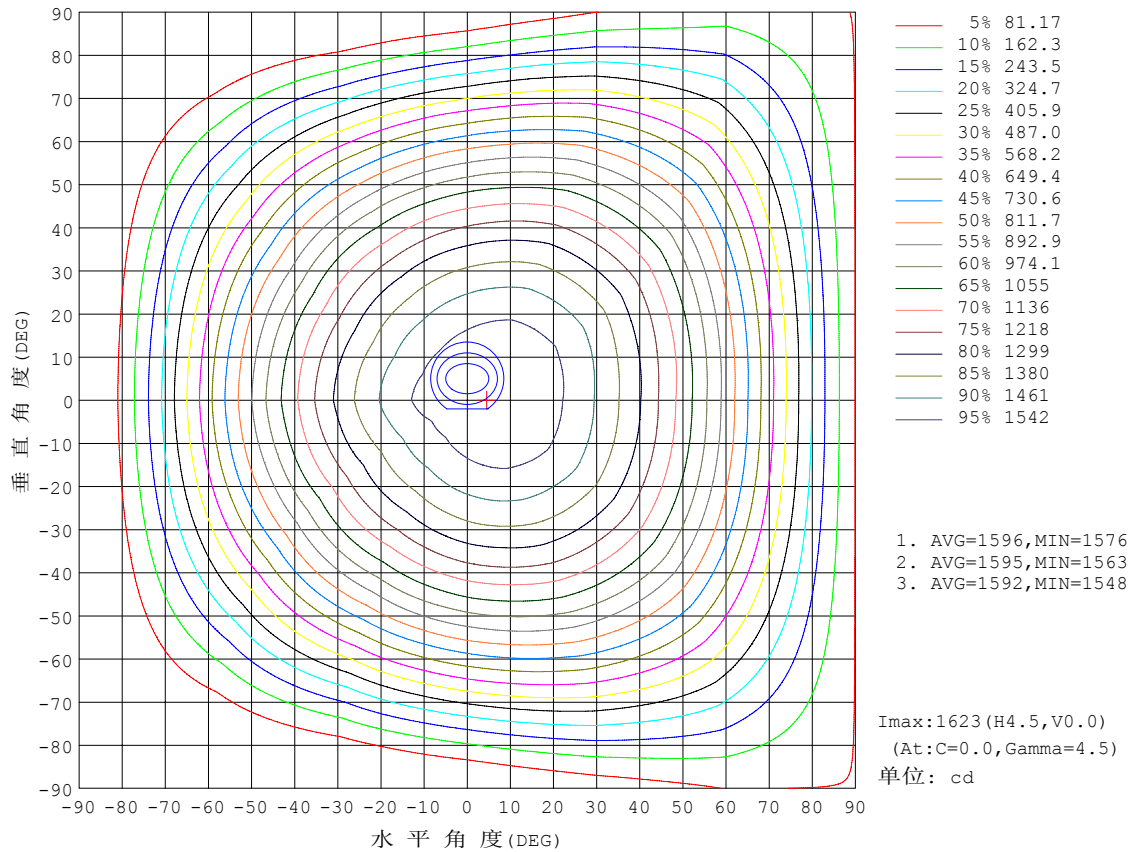


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2023-12-12

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 8.600米 [K=1.0000]
备注:

灯具有效平均照度图

实测参数: U:219.90V I:0.1780A P:38.450W PF:0.9750 Freq:50.00Hz 实检光通: 4758.46x1 lm		
灯具名称: MQG-LED-151L-L	灯具类型: LED 6500K	灯具重量: N/A
灯具规格: MQG-LED-151L-L	外型尺寸: 1195*595*32MM	测试编号: 21
制造厂商:	发光口面: 1.155*0.55	遮光角: N/A

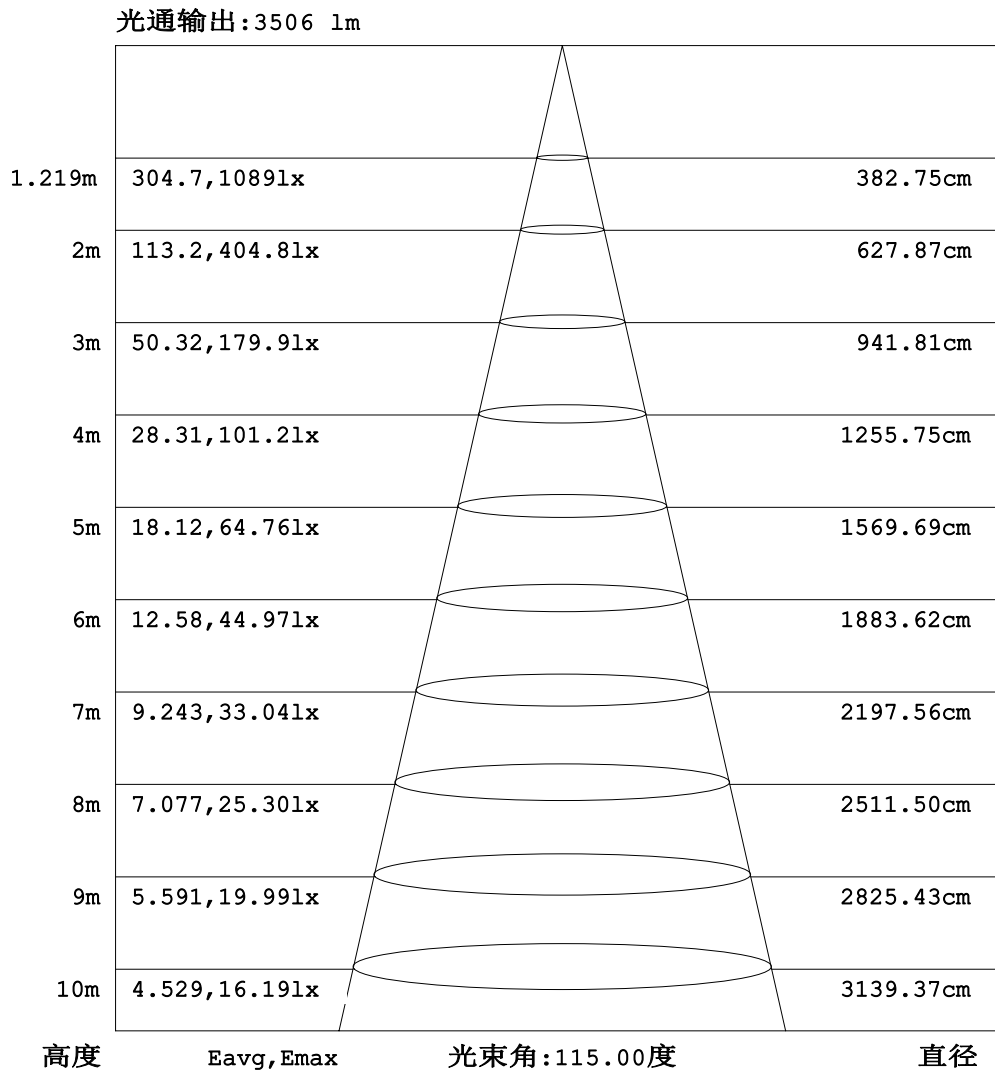


注: 曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2023-12-12

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 8.600米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:219.90V I:0.1780A P:38.450W PF:0.9750 Freq:50.00Hz 实检光通: 4758.46x1 lm		
灯具名称: MQG-LED-151L-L	灯具类型: LED 6500K	灯具重量: N/A
灯具规格: MQG-LED-151L-L	外型尺寸: 1195*595*32MM	测试编号: 21
制造厂商:	发光口面: 1.155*0.55	遮光角: N/A

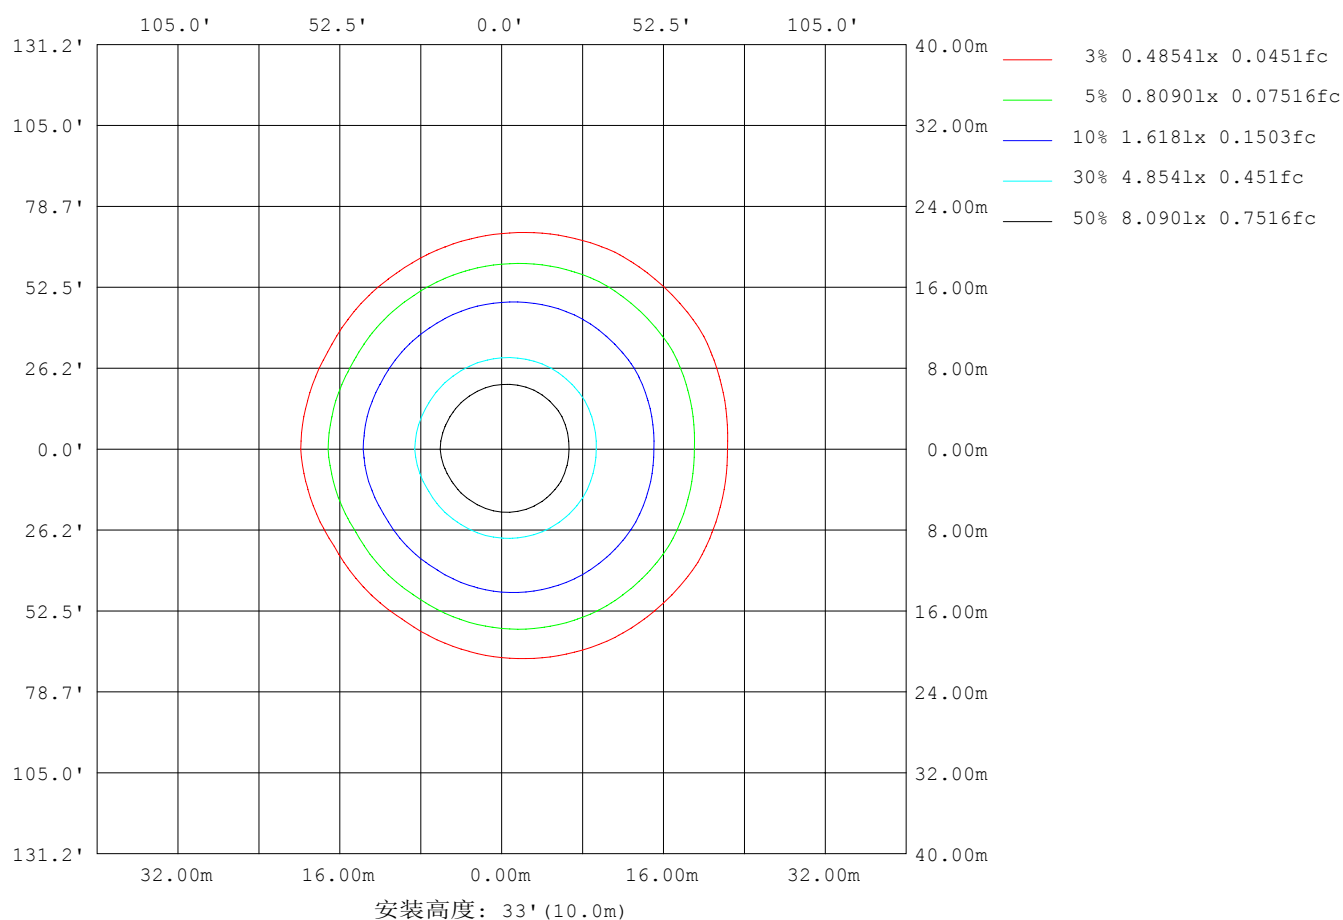

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2023-12-12

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 8.600米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:219.90V I:0.1780A P:38.450W PF:0.9750 Freq:50.00Hz 实检光通: 4758.46x1 lm		
灯具名称: MQG-LED-151L-L	灯具类型:LED 6500K	灯具重量: N/A
灯具规格: MQG-LED-151L-L	外型尺寸: 1195*595*32MM	测试编号: 21
制造厂商:	发光口面: 1.155*0.55	遮光角: N/A


平均亮度	数值(cd/m2)
L横(65)av	2271
L横(75)av	2047
L横(85)av	1891
L纵(65)av	2209
L纵(75)av	1903
L纵(85)av	1302
L45(65)av	2242
L45(75)av	1998
L45(85)av	1873

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:WEIJIE
测试日期:2023-12-12

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.446
环境湿度:65.0%
测试距离:8.600米 [K=1.0000]
备注:

平面照度曲线

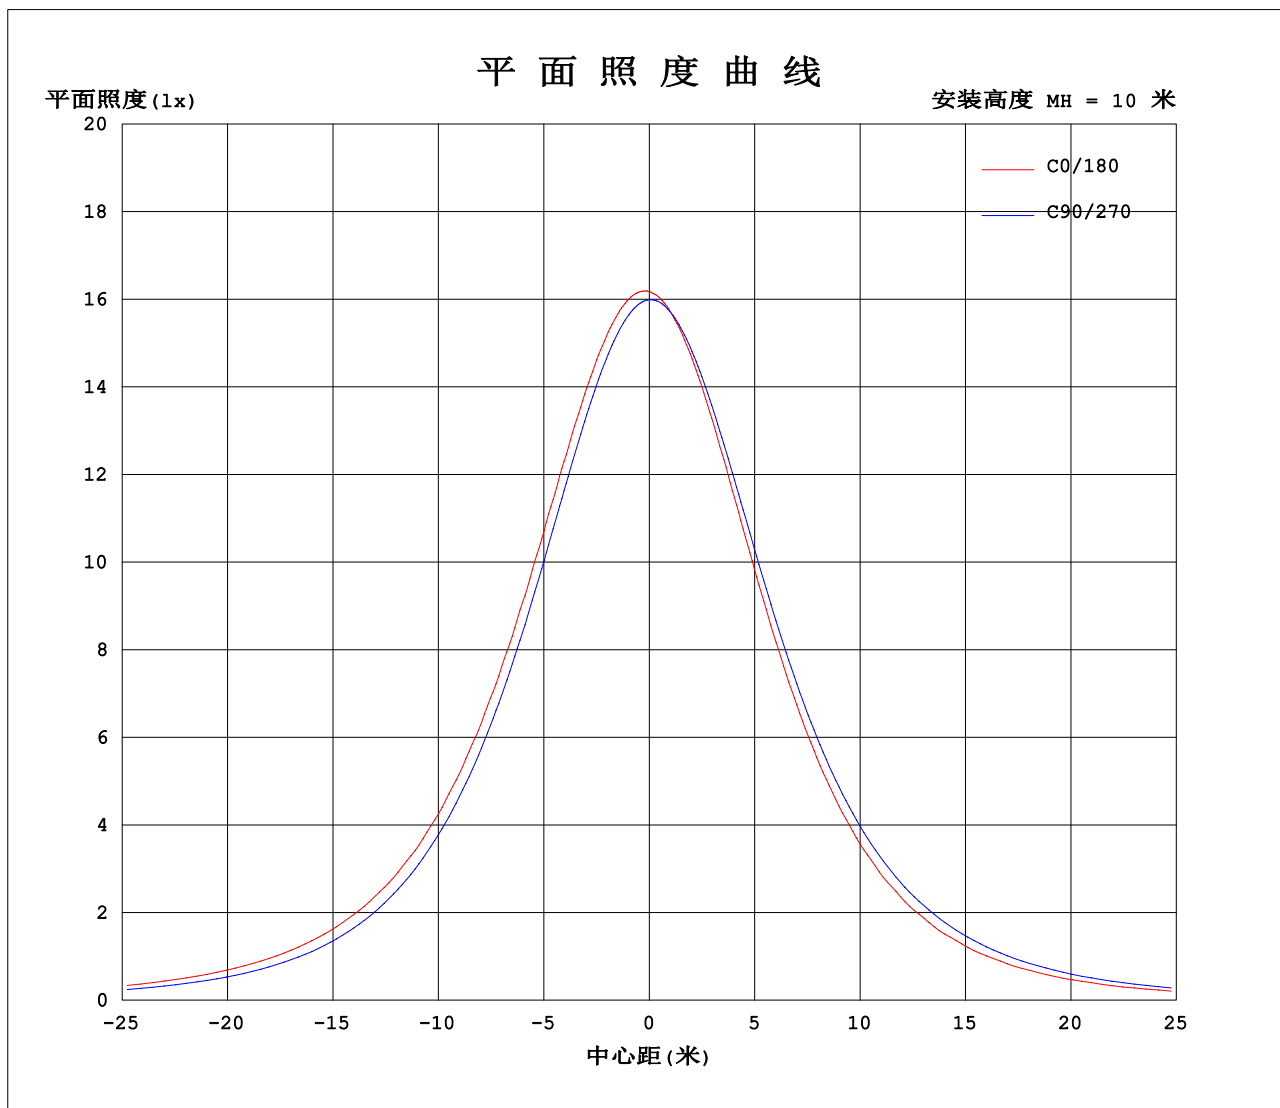

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2023-12-12

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 8.600米 [K=1.0000]
备注:

光强分布数据表格

实测参数: U:219.90V I:0.1780A P:38.450W PF:0.9750 Freq:50.00Hz 实检光通: 4758.46x1 lm		
灯具名称: MQG-LED-151L-L	灯具类型: LED 6500K	灯具重量: N/A
灯具规格: MQG-LED-151L-L	外型尺寸: 1195*595*32MM	测试编号: 21
制造厂商:	发光口面: 1.155*0.55	遮光角: N/A

表--1

单位: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1618	1611	1604	1599	1597	1602	1618	1611	1604	1599	1597	1602						
5	1623	1617	1604	1589	1576	1576	1600	1591	1591	1596	1605	1614						
10	1615	1610	1591	1566	1542	1538	1567	1559	1565	1580	1601	1613						
15	1593	1591	1565	1530	1496	1488	1523	1513	1526	1552	1583	1599						
20	1562	1558	1526	1482	1436	1425	1467	1456	1474	1511	1552	1572						
25	1514	1512	1475	1422	1367	1352	1397	1387	1411	1457	1508	1532						
30	1451	1454	1412	1350	1285	1266	1315	1305	1335	1392	1452	1480						
35	1384	1384	1337	1266	1193	1168	1226	1212	1247	1314	1384	1414						
40	1302	1302	1252	1172	1090	1062	1123	1110	1152	1224	1304	1338						
45	1202	1209	1155	1069	978	947	1008	996	1043	1124	1213	1248						
50	1101	1109	1047	955	859	825	891	873	924	1014	1111	1150						
55	988	995	932	830	726	693	764	743	802	894	1001	1041						
60	863	872	804	696	586	556	622	608	667	765	879	922						
65	732	744	668	558	449	417	487	470	523	628	747	796						
70	594	607	529	416	310	279	352	332	382	486	610	661						
75	457	463	389	280	180	154	216	202	247	346	467	522						
80	320	326	253	154	72.9	51.7	101	86.6	123	210	325	383						
85	189	196	132	50.3	6.54	3.69	20.3	10.9	28.0	93.8	193	245						
90	79.2	83.0	34.1	0.42	0.49	0.62	0.51	0.49	0.42	5.81	80.5	125						
95	9.80	10.2	0.49	0.56	0.65	0.78	0.69	0.60	0.56	0.38	7.65	31.7						
100	0.58	0.57	0.56	0.74	0.83	0.98	0.86	0.76	0.72	0.54	0.49	0.48						
105	0.75	0.74	0.73	0.92	0.99	1.19	1.04	0.91	0.86	0.71	0.64	0.55						
110	0.93	0.94	0.93	1.09	1.13	1.31	1.20	1.05	1.02	0.87	0.81	0.72						
115	1.09	1.11	1.10	1.26	1.30	1.40	1.29	1.17	1.17	1.02	0.98	0.88						
120	1.23	1.27	1.28	1.42	1.46	1.50	1.39	1.28	1.27	1.16	1.13	1.03						
125	1.32	1.41	1.50	1.62	1.55	1.63	1.49	1.39	1.37	1.30	1.29	1.17						
130	1.45	1.54	1.64	1.72	1.61	1.70	1.61	1.46	1.45	1.39	1.43	1.32						
135	1.54	1.71	1.75	1.80	1.69	1.77	1.72	1.53	1.53	1.49	1.54	1.41						
140	1.68	1.86	1.85	1.85	1.72	1.83	1.82	1.60	1.60	1.58	1.65	1.54						
145	1.78	1.97	1.92	1.87	1.77	1.88	1.91	1.68	1.66	1.65	1.74	1.64						
150	1.90	2.07	1.98	1.91	1.84	1.94	2.04	1.79	1.74	1.71	1.84	1.77						
155	2.02	2.16	2.03	1.97	1.90	2.01	2.15	1.91	1.82	1.78	1.92	1.97						
160	2.17	2.22	2.06	2.06	1.98	2.06	2.26	1.98	1.92	1.87	2.01	2.06						
165	2.23	2.23	2.11	2.10	2.08	2.12	2.27	2.08	2.02	1.98	2.08	2.13						
170	2.27	2.21	2.13	2.10	2.11	2.12	2.26	2.14	2.05	1.99	2.08	2.14						
175	2.25	2.21	2.13	2.10	2.11	2.12	2.25	2.14	2.08	2.02	2.08	2.14						
180	2.25	2.21	2.11	2.10	2.11	2.14	2.25	2.19	2.11	2.06	2.08	2.14						

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: WEIJIE

测试日期: 2023-12-12

γ角度范围: 0度 - 180度

γ角度间隔: 0.5度

测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446

环境湿度: 65.0%

测试距离: 8.600米 [K=1.0000]

备注: