


室内灯具光度数据


实测参数: U:219.90V I:0.1700A P:36.870W PF:0.9820 Freq:50.00Hz 实检光通: 4049.07x1 lm		
灯具名称: MQG-LED-136L	灯具类型: LED 6500K	灯具重量: N/A
灯具规格: MQG-LED-136L	外型尺寸: 1195*295*32MM	测试编号: 20
制造厂商:	发光口面: 1.155*0.25	遮光角: N/A

光源数据		光度数据				光效: 109.82 lm/W
型号	3.20.6500K	峰值光强(cd)	1391	S/MH(C0/180)	1.24	
标称功率(W)	36.87	灯具效率(%)	100.0	S/MH(C90/270)	1.28	
额定电源电压(V)	220	总光通量(lm)	4049.1	η UP, DN(C0-180)	0.1, 49.5	
额定光通量(lm)	4049.07	CIE分类	直接	η UP, DN(C180-360)	0.1, 50.2	
灯具内光源数(只)	1	上射光通比(%)	0.3	CIBSE SHR NOM	1.25	
实测电源电压(V)	220.1	下射光通比(%)	99.7	CIBSE SHR MAX	1.35	

室内灯具配光曲线

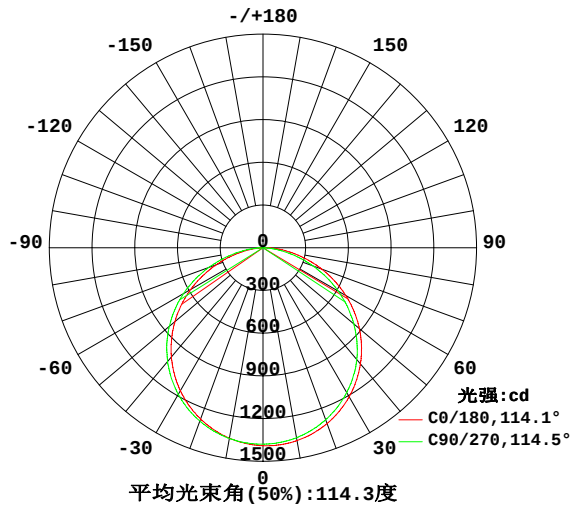

空间等照度曲线(单位: lx)

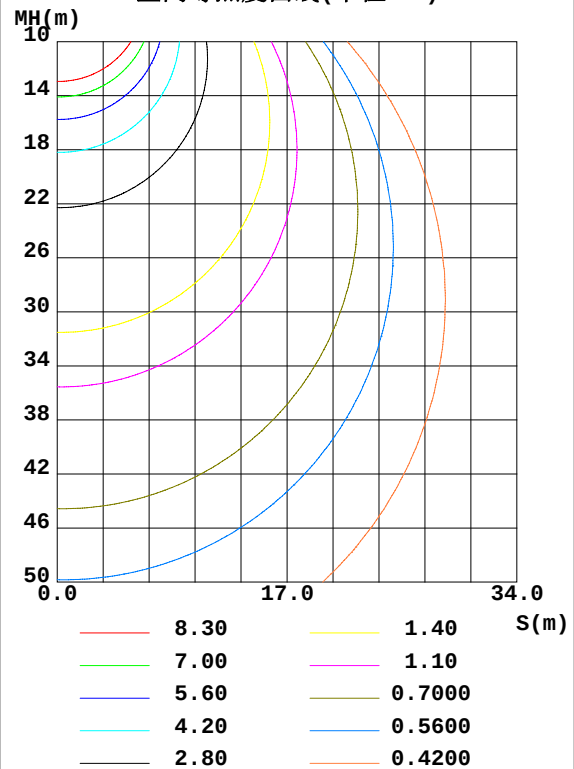

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2023-12-12

γ 角度范围: 0度 - 180度
 γ 角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 8.600米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:

γ	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	$\Phi_{\text{环}}$	$\Phi_{\text{总}}$	%lum, lamp
10	1375	1371	1355	1339	1358	1352	1360	1372	0- 10	130.9	130.9	3.23, 3.23
20	1314	1312	1286	1256	1280	1275	1296	1319	10- 20	375.8	506.7	12.5, 12.5
30	1210	1210	1175	1133	1160	1156	1190	1223	20- 30	572.4	1079	26.7, 26.7
40	1064	1068	1024	970.6	1001	997.7	1043	1086	30- 40	695.2	1774	43.8, 43.8
50	884.4	888.5	833.2	773.7	807.1	804.6	858.9	911.9	40- 50	726.8	2501	61.8, 61.8
60	671.7	675.2	611.7	547.8	586.1	583.6	644.7	705.7	50- 60	660.8	3162	78.1, 78.1
70	438.8	439.0	372.7	308.8	348.7	345.2	407.2	474.2	60- 70	505.3	3667	90.6, 90.6
80	206.6	203.7	144.3	94.91	127.9	121.4	169.1	236.0	70- 80	289.9	3957	97.7, 97.7
90	24.98	24.92	0.3146	0.4200	0.4556	0.4321	0.4014	38.26	80- 90	81.86	4039	99.7, 99.7
100	0.5543	0.5248	0.6245	0.6818	0.6244	0.5757	0.4712	0.5044	90-100	2.530	4041	99.8, 99.8
110	0.8692	0.8622	1.022	1.045	0.9667	0.9200	0.8411	0.7860	100-110	0.7789	4042	99.8, 99.8
120	1.215	1.306	1.401	1.435	1.313	1.246	1.225	1.144	110-120	1.089	4043	99.9, 99.9
130	1.539	1.639	1.688	1.701	1.591	1.514	1.544	1.491	120-130	1.292	4045	99.9, 99.9
140	1.831	1.947	1.919	1.914	1.863	1.743	1.817	1.803	130-140	1.332	4046	99.9, 99.9
150	2.117	2.226	2.108	2.129	2.136	1.988	2.016	2.087	140-150	1.243	4047	100, 100
160	2.418	2.395	2.298	2.270	2.446	2.222	2.219	2.344	150-160	1.022	4048	100, 100
170	2.586	2.446	2.395	2.407	2.580	2.376	2.342	2.465	160-170	0.6761	4049	100, 100
180	2.589	2.457	2.441	2.471	2.589	2.473	2.436	2.469	170-180	0.2341	4049	100, 100
单位:°	光强:cd									单位:lm		

锥面光通量(90度): 2139.9 lm

%lum = 52.8%

%lamp = 52.8%

锥面光通量(120度): 3161.8 lm

%lum = 78.1%


%lamp = 78.1%

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2023-12-12

γ 角度范围: 0度 - 180度
 γ 角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 8.600米 [K=1.0000]
备注:

灯具亮度限制曲线

实测参数：U:219.90V I:0.1700A P:36.870W PF:0.9820 Freq:50.00Hz 实检光通：4049.07x1 lm		
灯具名称：MQG-LED-136L	灯具类型：LED 6500K	灯具重量：N/A
灯具规格：MQG-LED-136L	外型尺寸：1195*295*32MM	测试编号：20
制造厂商：	发光口面：1.155*0.25	遮光角：N/A

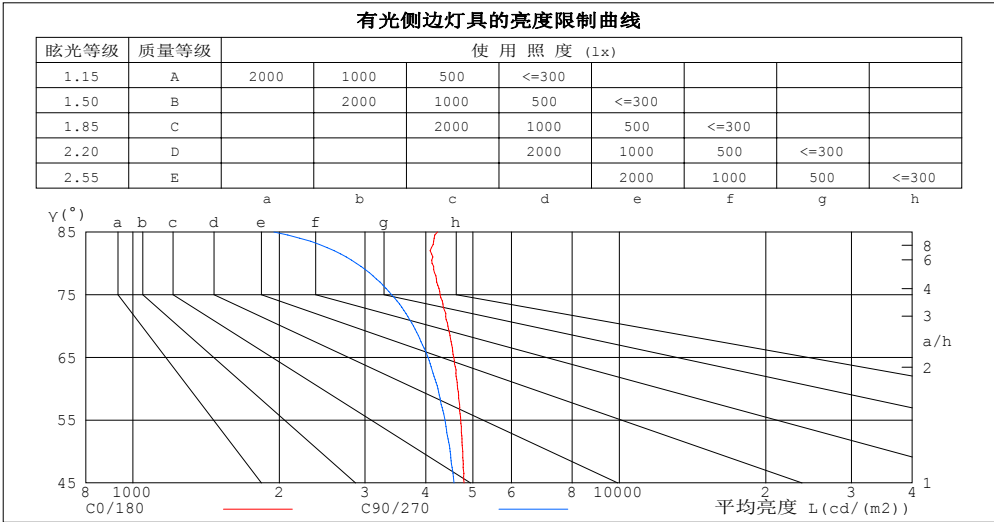

平均亮度值 cd/(m2)		
γ(°)	C0/180	C90/270
85	4230	1950
80	4122	2879
75	4281	3402
70	4444	3774
65	4568	4044
60	4653	4238
55	4718	4382
50	4766	4490
45	4794	4570


C角度范围： 0度 - 360度
C角度间隔： 30.0度
测试速度：快速
环境温度:25.3℃
测试人员:WEIJIE
测试日期:2023-12-12

γ角度范围： 0度 - 180度
γ角度间隔： 0.5度
测试系统：远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度:65.0%
测试距离:8.600米 [K=1.0000]
备注：

工作面利用系数和灯具概算曲线

实测参数: U:219.90V I:0.1700A P:36.870W PF:0.9820 Freq:50.00Hz			实检光通: 4049.07x1 lm		
灯具名称: MQG-LED-136L		灯具类型: LED 6500K		灯具重量: N/A	
灯具规格: MQG-LED-136L		外型尺寸: 1195*295*32MM		测试编号: 20	
制造厂商:		发光口面: 1.155*0.25		遮光角: N/A	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.85	.79	.75	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.72	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.64	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.52	.46	.57	.50	.45	.55	.49	.45	.43
6.0	.56	.47	.41	.55	.47	.40	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.46	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.29	.42	.34	.29	.41	.33	.28	.40	.33	.28	.39	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.24

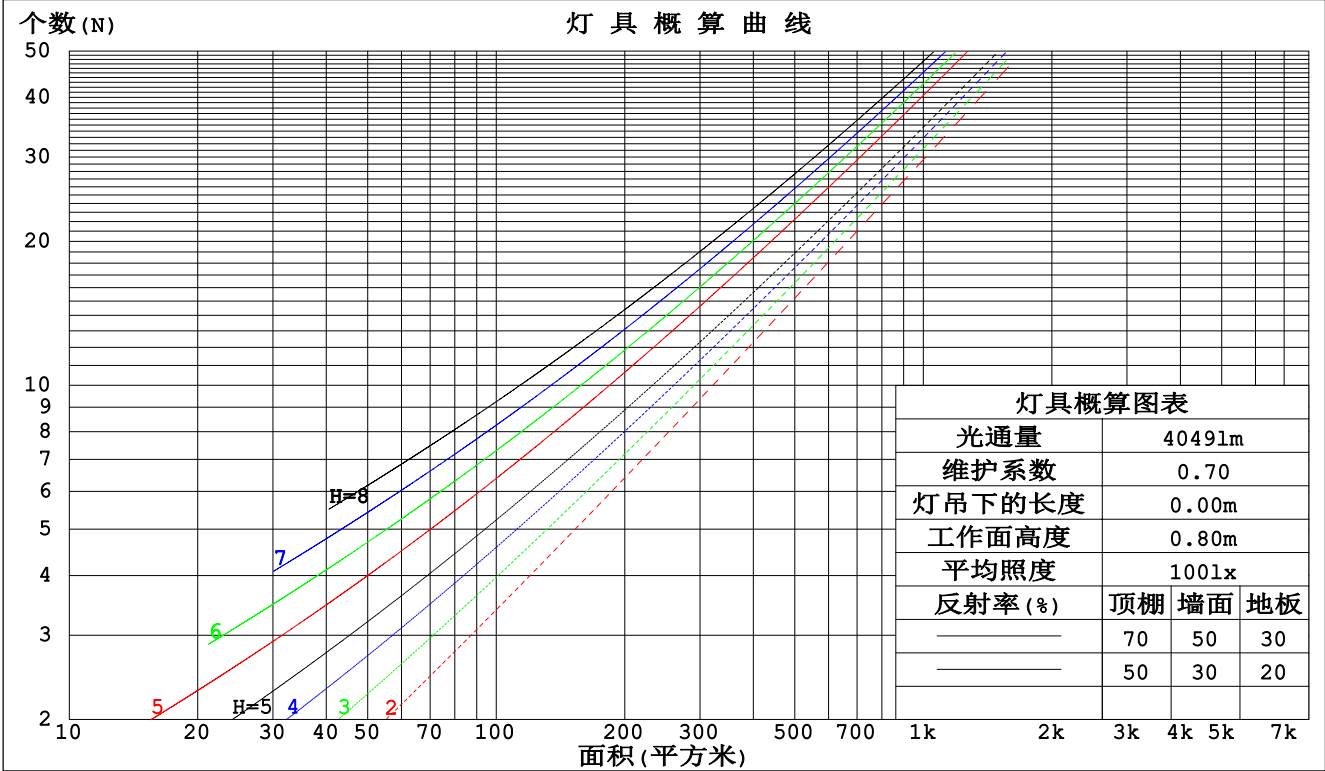

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2023-12-12

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 8.600米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:219.90V I:0.1700A P:36.870W PF:0.9820 Freq:50.00Hz 实检光通: 4049.07x1 lm		
灯具名称: MQG-LED-136L	灯具类型: LED 6500K	灯具重量: N/A
灯具规格: MQG-LED-136L	外型尺寸: 1195*295*32MM	测试编号: 20
制造厂商:	发光口面: 1.155*0.25	遮光角: N/A

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.313	.178	.056	.306	.174	.055	.292	.168	.054	.280	.162	.052	.269	.156	.050	
2.0	.294	.161	.049	.288	.158	.049	.276	.153	.048	.265	.149	.047	.255	.144	.045	
3.0	.272	.145	.043	.266	.143	.043	.256	.139	.042	.246	.135	.041	.237	.131	.041	
4.0	.251	.130	.038	.246	.129	.038	.236	.125	.037	.228	.122	.037	.220	.119	.036	
5.0	.232	.118	.034	.227	.117	.034	.219	.114	.034	.211	.111	.033	.204	.109	.033	
6.0	.215	.108	.031	.211	.106	.031	.203	.104	.030	.197	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.190	.096	.028	.183	.094	.027	.178	.092	.027	
8.0	.186	.091	.026	.183	.090	.026	.177	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.084	.024	.172	.084	.024	.167	.082	.023	.162	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.076	.022	.148	.075	.021	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.182	.158	.136	.156	.136	.117	.107	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.174	.134	.100	.149	.115	.086	.102	.080	.060	.059	.046	.035	.019	.015	.011	
3.0	.167	.116	.076	.143	.100	.066	.098	.070	.046	.057	.041	.027	.018	.013	.009	
4.0	.159	.103	.060	.137	.089	.052	.094	.062	.037	.054	.036	.022	.017	.012	.007	
5.0	.152	.093	.049	.130	.080	.043	.090	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.145	.084	.041	.124	.073	.036	.086	.051	.025	.050	.030	.015	.016	.010	.005	
7.0	.138	.077	.035	.118	.067	.031	.082	.047	.022	.048	.028	.013	.015	.009	.004	
8.0	.131	.072	.031	.113	.062	.027	.078	.044	.019	.045	.026	.011	.015	.008	.004	
9.0	.125	.067	.027	.108	.058	.024	.075	.041	.017	.044	.024	.010	.014	.008	.003	
10.0	.119	.062	.024	.103	.054	.021	.071	.038	.015	.042	.023	.009	.014	.007	.003	

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2023-12-12

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 8.600米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:219.90V I:0.1700A P:36.870W PF:0.9820 Freq:50.00Hz 实检光通: 4049.07x1 lm										
灯具名称: MQG-LED-136L			灯具类型: LED 6500K			灯具重量: N/A				
灯具规格: MQG-LED-136L			外型尺寸: 1195*295*32MM			测试编号: 20				
制造厂商:			发光口面: 1.155*0.25			遮光角: N/A				
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉 (Viewed crosswise)					向前 (Viewed endwise)				
x = 2H y = 2H	18.6	20.1	18.9	20.3	20.5	18.2	19.7	18.5	19.9	20.2
3H	20.2	21.7	20.5	21.9	22.1	19.7	21.1	20.0	21.3	21.6
4H	20.9	22.3	21.3	22.5	22.8	20.3	21.6	20.6	21.9	22.1
6H	21.5	22.7	21.8	23.0	23.3	20.6	21.9	21.0	22.2	22.5
8H	21.7	22.9	22.0	23.2	23.5	20.7	21.9	21.1	22.2	22.5
12H	21.8	23.0	22.2	23.3	23.6	20.8	21.9	21.1	22.2	22.5
4H 2H	19.2	20.6	19.5	20.8	21.1	18.9	20.3	19.3	20.5	20.8
3H	21.1	22.3	21.4	22.6	22.9	20.6	21.8	21.0	22.1	22.4
4H	21.9	23.0	22.3	23.3	23.7	21.3	22.4	21.7	22.7	23.1
6H	22.6	23.6	23.0	23.9	24.3	21.8	22.8	22.2	23.1	23.5
8H	22.9	23.8	23.3	24.2	24.6	22.0	22.9	22.4	23.2	23.6
12H	23.1	23.9	23.6	24.3	24.7	22.1	22.9	22.5	23.3	23.7
8H 4H	22.2	23.1	22.7	23.5	23.9	21.7	22.6	22.1	23.0	23.4
6H	23.1	23.9	23.6	24.3	24.7	22.4	23.1	22.8	23.5	24.0
8H	23.5	24.2	24.0	24.6	25.1	22.6	23.3	23.1	23.7	24.2
12H	23.8	24.4	24.3	24.9	25.3	22.8	23.3	23.3	23.8	24.3
12H 4H	22.2	23.1	22.7	23.5	23.9	21.7	22.6	22.2	23.0	23.4
6H	23.2	23.8	23.7	24.3	24.7	22.5	23.1	23.0	23.6	24.0
8H	23.6	24.2	24.1	24.7	25.1	22.8	23.4	23.3	23.8	24.3
不同间隔布灯时, 观察者位置引起的UGR变化 (CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.1 / - 0.4					+ 0.2 / - 0.4				

依据CIE Pub.117计算, 4049lm光源光通, 表格已经进行修正 ($8\log(F/F_0) = 4.9$)。
出光口面积: 0.2887 m²

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2023-12-12

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 8.600米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:219.90V I:0.1700A P:36.870W PF:0.9820 Freq:50.00Hz 实检光通: 4049.07x1 lm		
灯具名称: MQG-LED-136L	灯具类型: LED 6500K	灯具重量: N/A
灯具规格: MQG-LED-136L	外型尺寸: 1195*295*32MM	测试编号: 20
制造厂商:	发光口面: 1.155*0.25	遮光角: N/A


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	76	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	64	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	79	93	85	79	89	82	77	69
2.50	99	91	85	96	89	84	93	87	82	73
3.00	102	95	89	100	93	88	96	90	86	78
4.00	106	100	96	104	98	94	99	95	91	82
5.00	108	104	99	106	102	98	101	98	95	85
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2023-12-12

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 8.600米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:219.90V I:0.1700A P:36.870W PF:0.9820 Freq:50.00Hz 实检光通: 4049.07x1 lm		
灯具名称: MQG-LED-136L	灯具类型: LED 6500K	灯具重量: N/A
灯具规格: MQG-LED-136L	外型尺寸: 1195*295*32MM	测试编号: 20
制造厂商:	发光口面: 1.155*0.25	遮光角: N/A

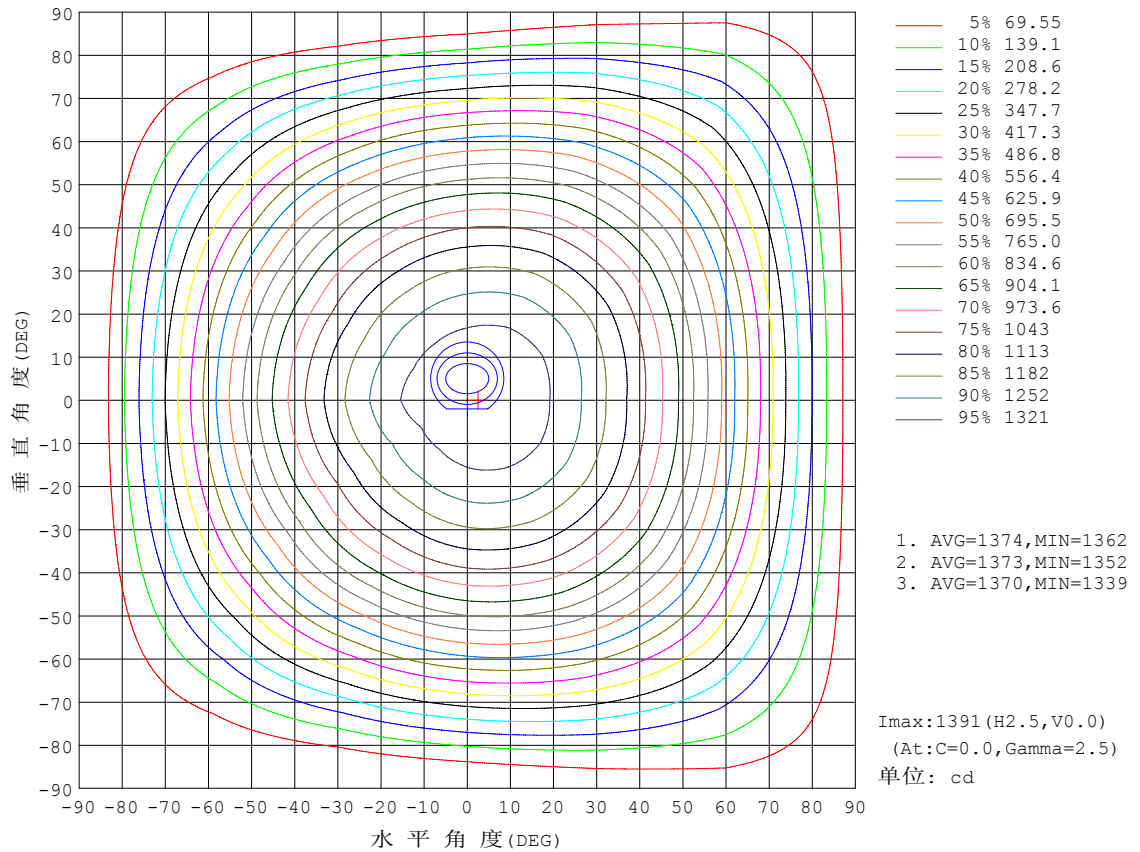


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2023-12-12

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 8.600米 [K=1.0000]
备注:

灯具有效平均照度图

实测参数: U:219.90V I:0.1700A P:36.870W PF:0.9820 Freq:50.00Hz 实检光通: 4049.07x1 lm		
灯具名称: MQG-LED-136L	灯具类型: LED 6500K	灯具重量: N/A
灯具规格: MQG-LED-136L	外型尺寸: 1195*295*32MM	测试编号: 20
制造厂商:	发光口面: 1.155*0.25	遮光角: N/A

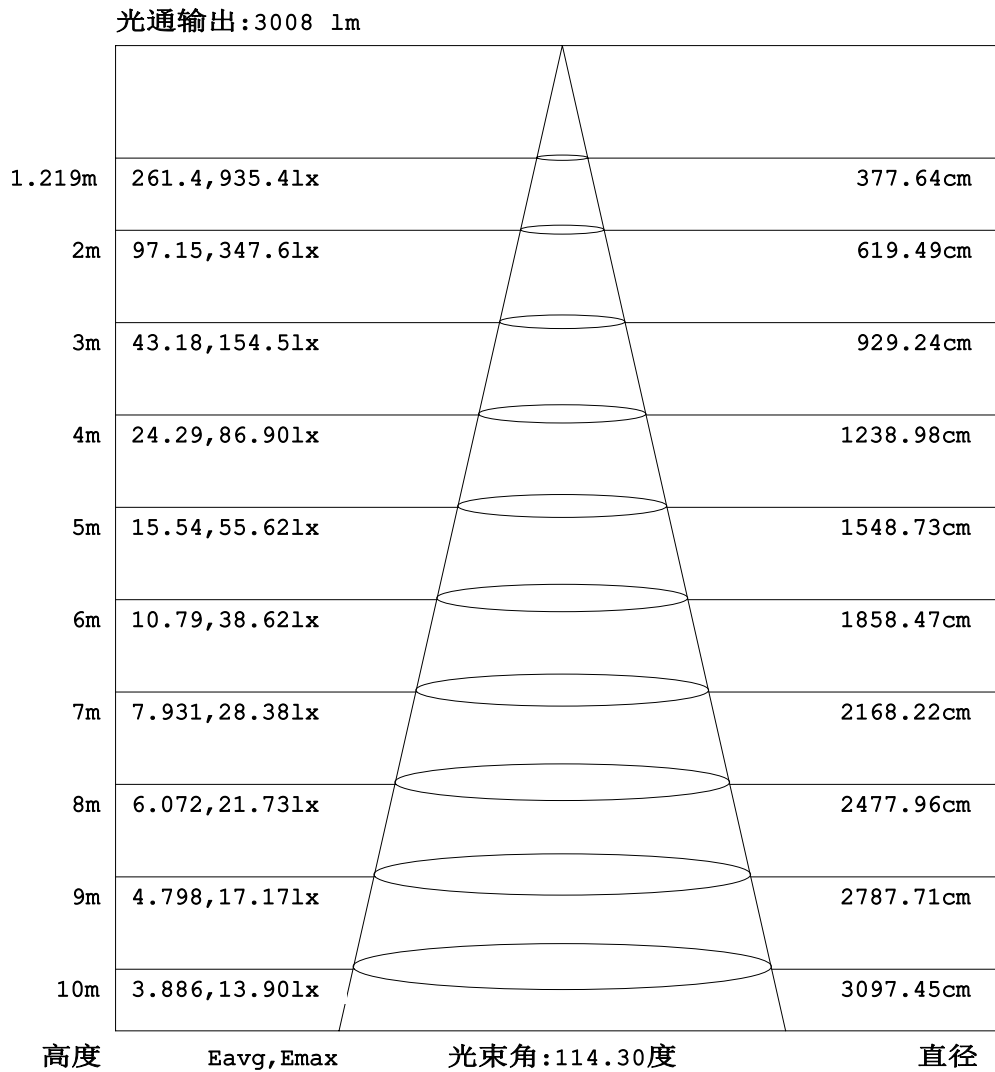


注: 曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2023-12-12

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 8.600米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:219.90V I:0.1700A P:36.870W PF:0.9820 Freq:50.00Hz 实检光通: 4049.07x1 lm		
灯具名称: MQG-LED-136L	灯具类型: LED 6500K	灯具重量: N/A
灯具规格: MQG-LED-136L	外型尺寸: 1195*295*32MM	测试编号: 20
制造厂商:	发光口面: 1.155*0.25	遮光角: N/A

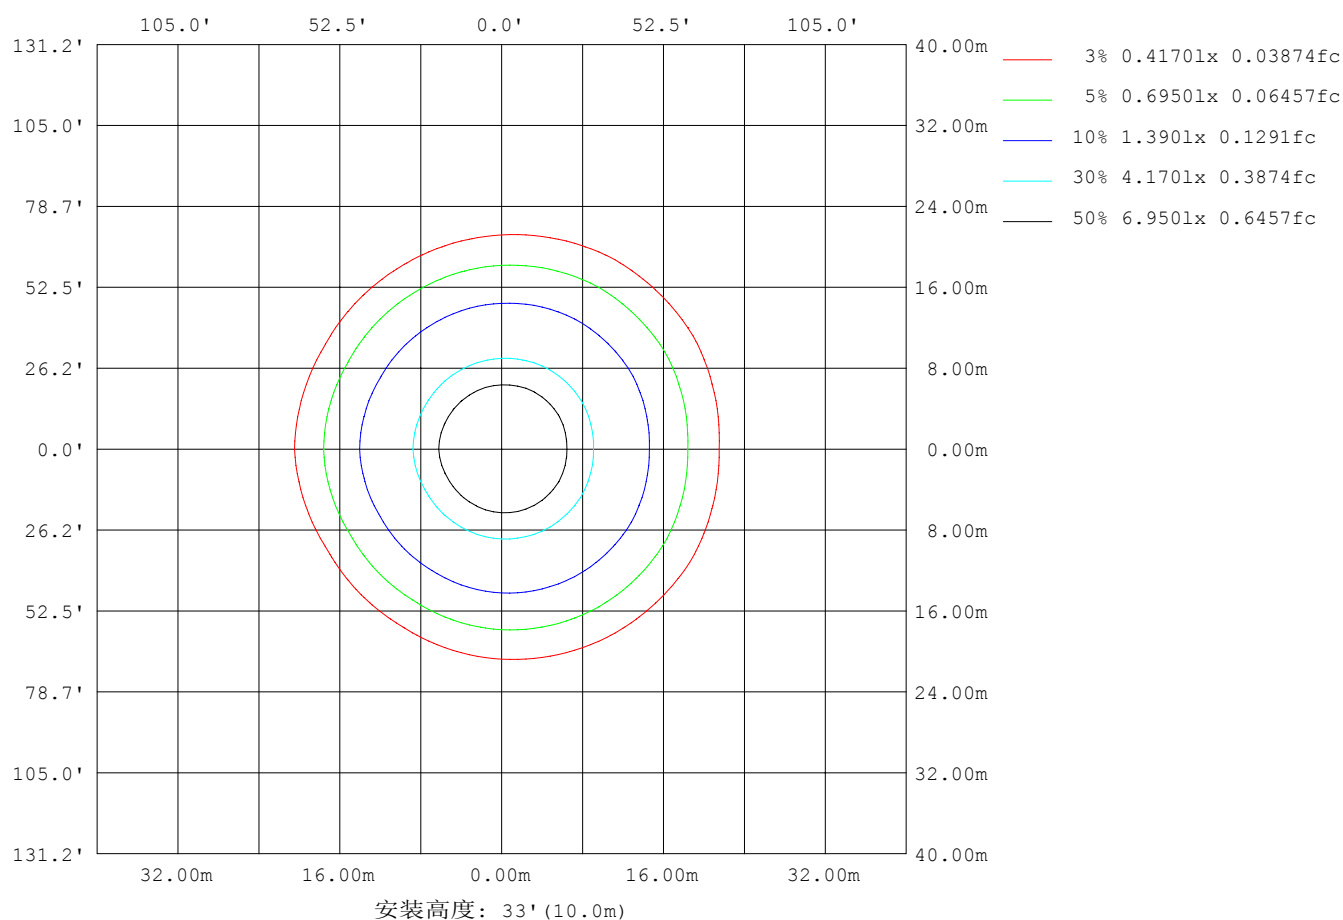

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2023-12-12

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 8.600米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:219.90V I:0.1700A P:36.870W PF:0.9820 Freq:50.00Hz 实检光通: 4049.07x1 lm		
灯具名称: MQG-LED-136L	灯具类型: LED 6500K	灯具重量: N/A
灯具规格: MQG-LED-136L	外型尺寸: 1195*295*32MM	测试编号: 20
制造厂商:	发光口面: 1.155*0.25	遮光角: N/A


平均亮度	数值(cd/m2)
L横(65)av	4204
L横(75)av	3698
L横(85)av	2921
L纵(65)av	4185
L纵(75)av	3607
L纵(85)av	2327
L45(65)av	4189
L45(75)av	3666
L45(85)av	2813

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2023-12-12

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 8.600米 [K=1.0000]
备注:

平面照度曲线

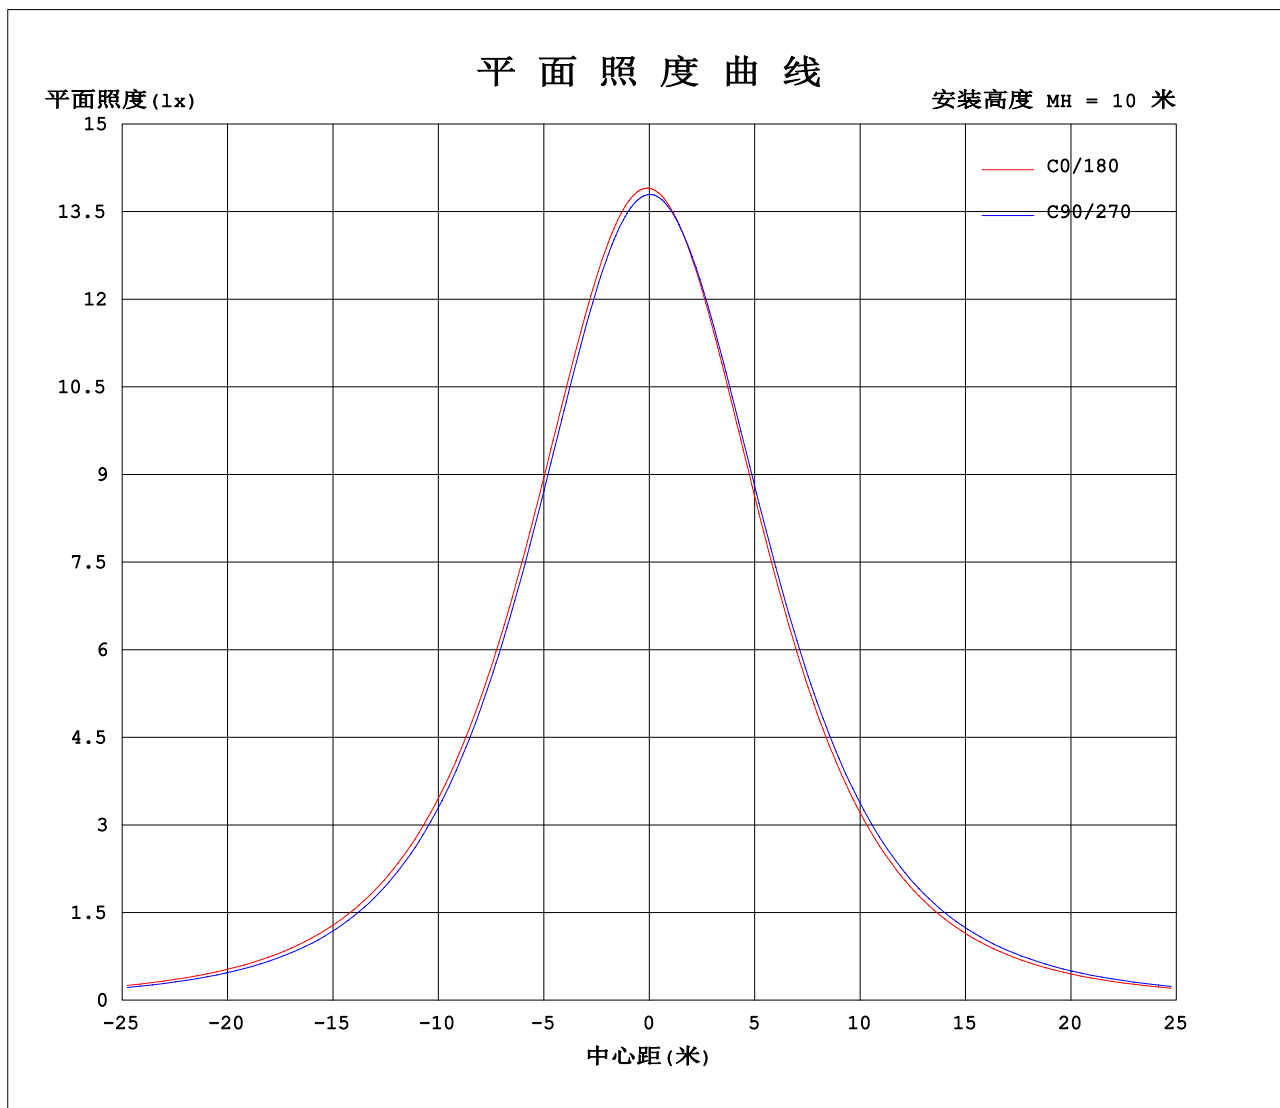

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2023-12-12

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 8.600米 [K=1.0000]
备注:

光强分布数据表格

实测参数: U:219.90V I:0.1700A P:36.870W PF:0.9820 Freq:50.00Hz 实检光通: 4049.07x1 lm		
灯具名称: MQG-LED-136L	灯具类型: LED 6500K	灯具重量: N/A
灯具规格: MQG-LED-136L	外型尺寸: 1195*295*32MM	测试编号: 20
制造厂商:	发光口面: 1.155*0.25	遮光角: N/A

表--1

单位: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1390	1386	1383	1380	1378	1379	1390	1386	1383	1380	1378	1379						
5	1389	1386	1380	1373	1365	1364	1380	1374	1374	1375	1380	1382						
10	1375	1375	1366	1355	1342	1337	1358	1351	1353	1360	1370	1374						
15	1350	1352	1342	1325	1306	1301	1325	1317	1322	1333	1348	1354						
20	1314	1318	1306	1286	1261	1252	1280	1271	1279	1296	1316	1323						
25	1268	1273	1259	1236	1205	1194	1226	1215	1227	1248	1273	1281						
30	1210	1218	1203	1175	1139	1127	1160	1149	1164	1190	1219	1228						
35	1141	1152	1135	1104	1065	1048	1085	1073	1091	1121	1154	1165						
40	1064	1076	1059	1024	981	961	1001	988	1008	1043	1081	1092						
45	979	993	974	933	886	867	909	893	916	955	997	1009						
50	884	900	877	833	783	765	807	792	817	859	905	918						
55	781	799	771	726	672	656	700	684	711	755	806	820						
60	672	692	659	612	555	541	586	569	598	645	698	713						
65	557	576	542	493	436	420	468	451	479	528	584	601						
70	439	455	423	373	317	301	349	332	358	407	465	484						
75	320	334	302	254	202	188	233	218	239	285	343	364						
80	207	219	188	144	100	89.5	128	113	130	169	224	248						
85	106	116	87.7	49.1	22.0	14.1	40.5	26.9	39.0	68.0	117	140						
90	25.0	34.2	15.6	0.31	0.40	0.44	0.46	0.44	0.42	0.40	28.6	48.0						
95	0.44	0.43	0.43	0.45	0.48	0.56	0.47	0.45	0.45	0.31	0.48	0.56						
100	0.55	0.53	0.52	0.62	0.65	0.72	0.62	0.58	0.57	0.47	0.52	0.49						
105	0.73	0.69	0.71	0.82	0.83	0.89	0.79	0.74	0.74	0.65	0.66	0.58						
110	0.87	0.85	0.87	1.02	1.02	1.07	0.97	0.92	0.92	0.84	0.83	0.74						
115	1.04	1.04	1.09	1.22	1.23	1.23	1.14	1.08	1.11	1.04	1.02	0.92						
120	1.22	1.21	1.40	1.40	1.49	1.38	1.31	1.23	1.26	1.22	1.21	1.08						
125	1.39	1.38	1.60	1.56	1.64	1.52	1.45	1.36	1.41	1.39	1.39	1.26						
130	1.54	1.54	1.73	1.69	1.77	1.64	1.59	1.49	1.54	1.54	1.56	1.42						
135	1.69	1.71	1.89	1.81	1.89	1.73	1.73	1.63	1.67	1.69	1.71	1.61						
140	1.83	1.89	2.00	1.92	1.97	1.85	1.86	1.72	1.77	1.82	1.86	1.75						
145	1.97	2.12	2.10	2.01	2.06	2.03	1.99	1.84	1.88	1.92	2.02	1.90						
150	2.12	2.26	2.20	2.11	2.13	2.13	2.14	1.97	2.01	2.02	2.14	2.04						
155	2.26	2.38	2.26	2.21	2.21	2.24	2.28	2.10	2.12	2.13	2.24	2.20						
160	2.42	2.48	2.31	2.30	2.26	2.28	2.45	2.23	2.21	2.22	2.33	2.36						
165	2.53	2.52	2.36	2.35	2.34	2.38	2.57	2.32	2.30	2.28	2.39	2.44						
170	2.59	2.52	2.38	2.39	2.36	2.45	2.58	2.38	2.37	2.34	2.43	2.50						
175	2.59	2.52	2.39	2.43	2.40	2.48	2.59	2.44	2.40	2.36	2.44	2.49						
180	2.59	2.51	2.40	2.44	2.45	2.50	2.59	2.51	2.44	2.44	2.45	2.49						

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: WEIJIE

测试日期: 2023-12-12

γ角度范围: 0度 - 180度

γ角度间隔: 0.5度

测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.446

环境湿度: 65.0%

测试距离: 8.600米 [K=1.0000]

备注: